


# YARRA



2024-25  
Collection

[www.yarratiles.com](http://www.yarratiles.com)

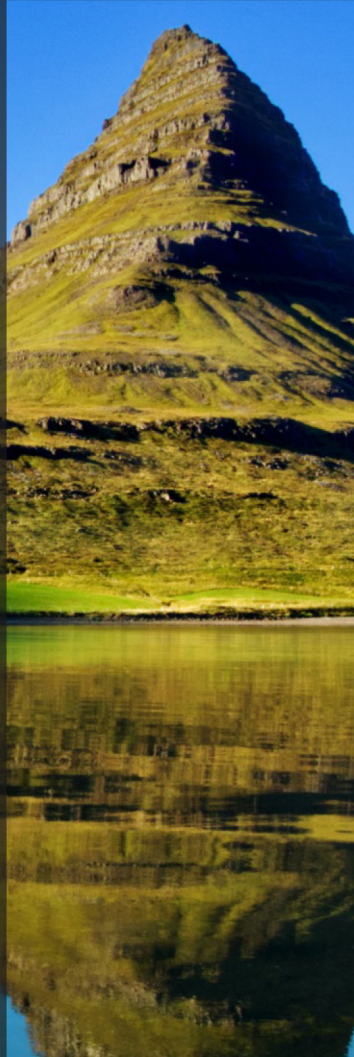

**ASTONE**

SERIES



by


**YARRA**

# About Us

# YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

[www.yarratiles.com](http://www.yarratiles.com)

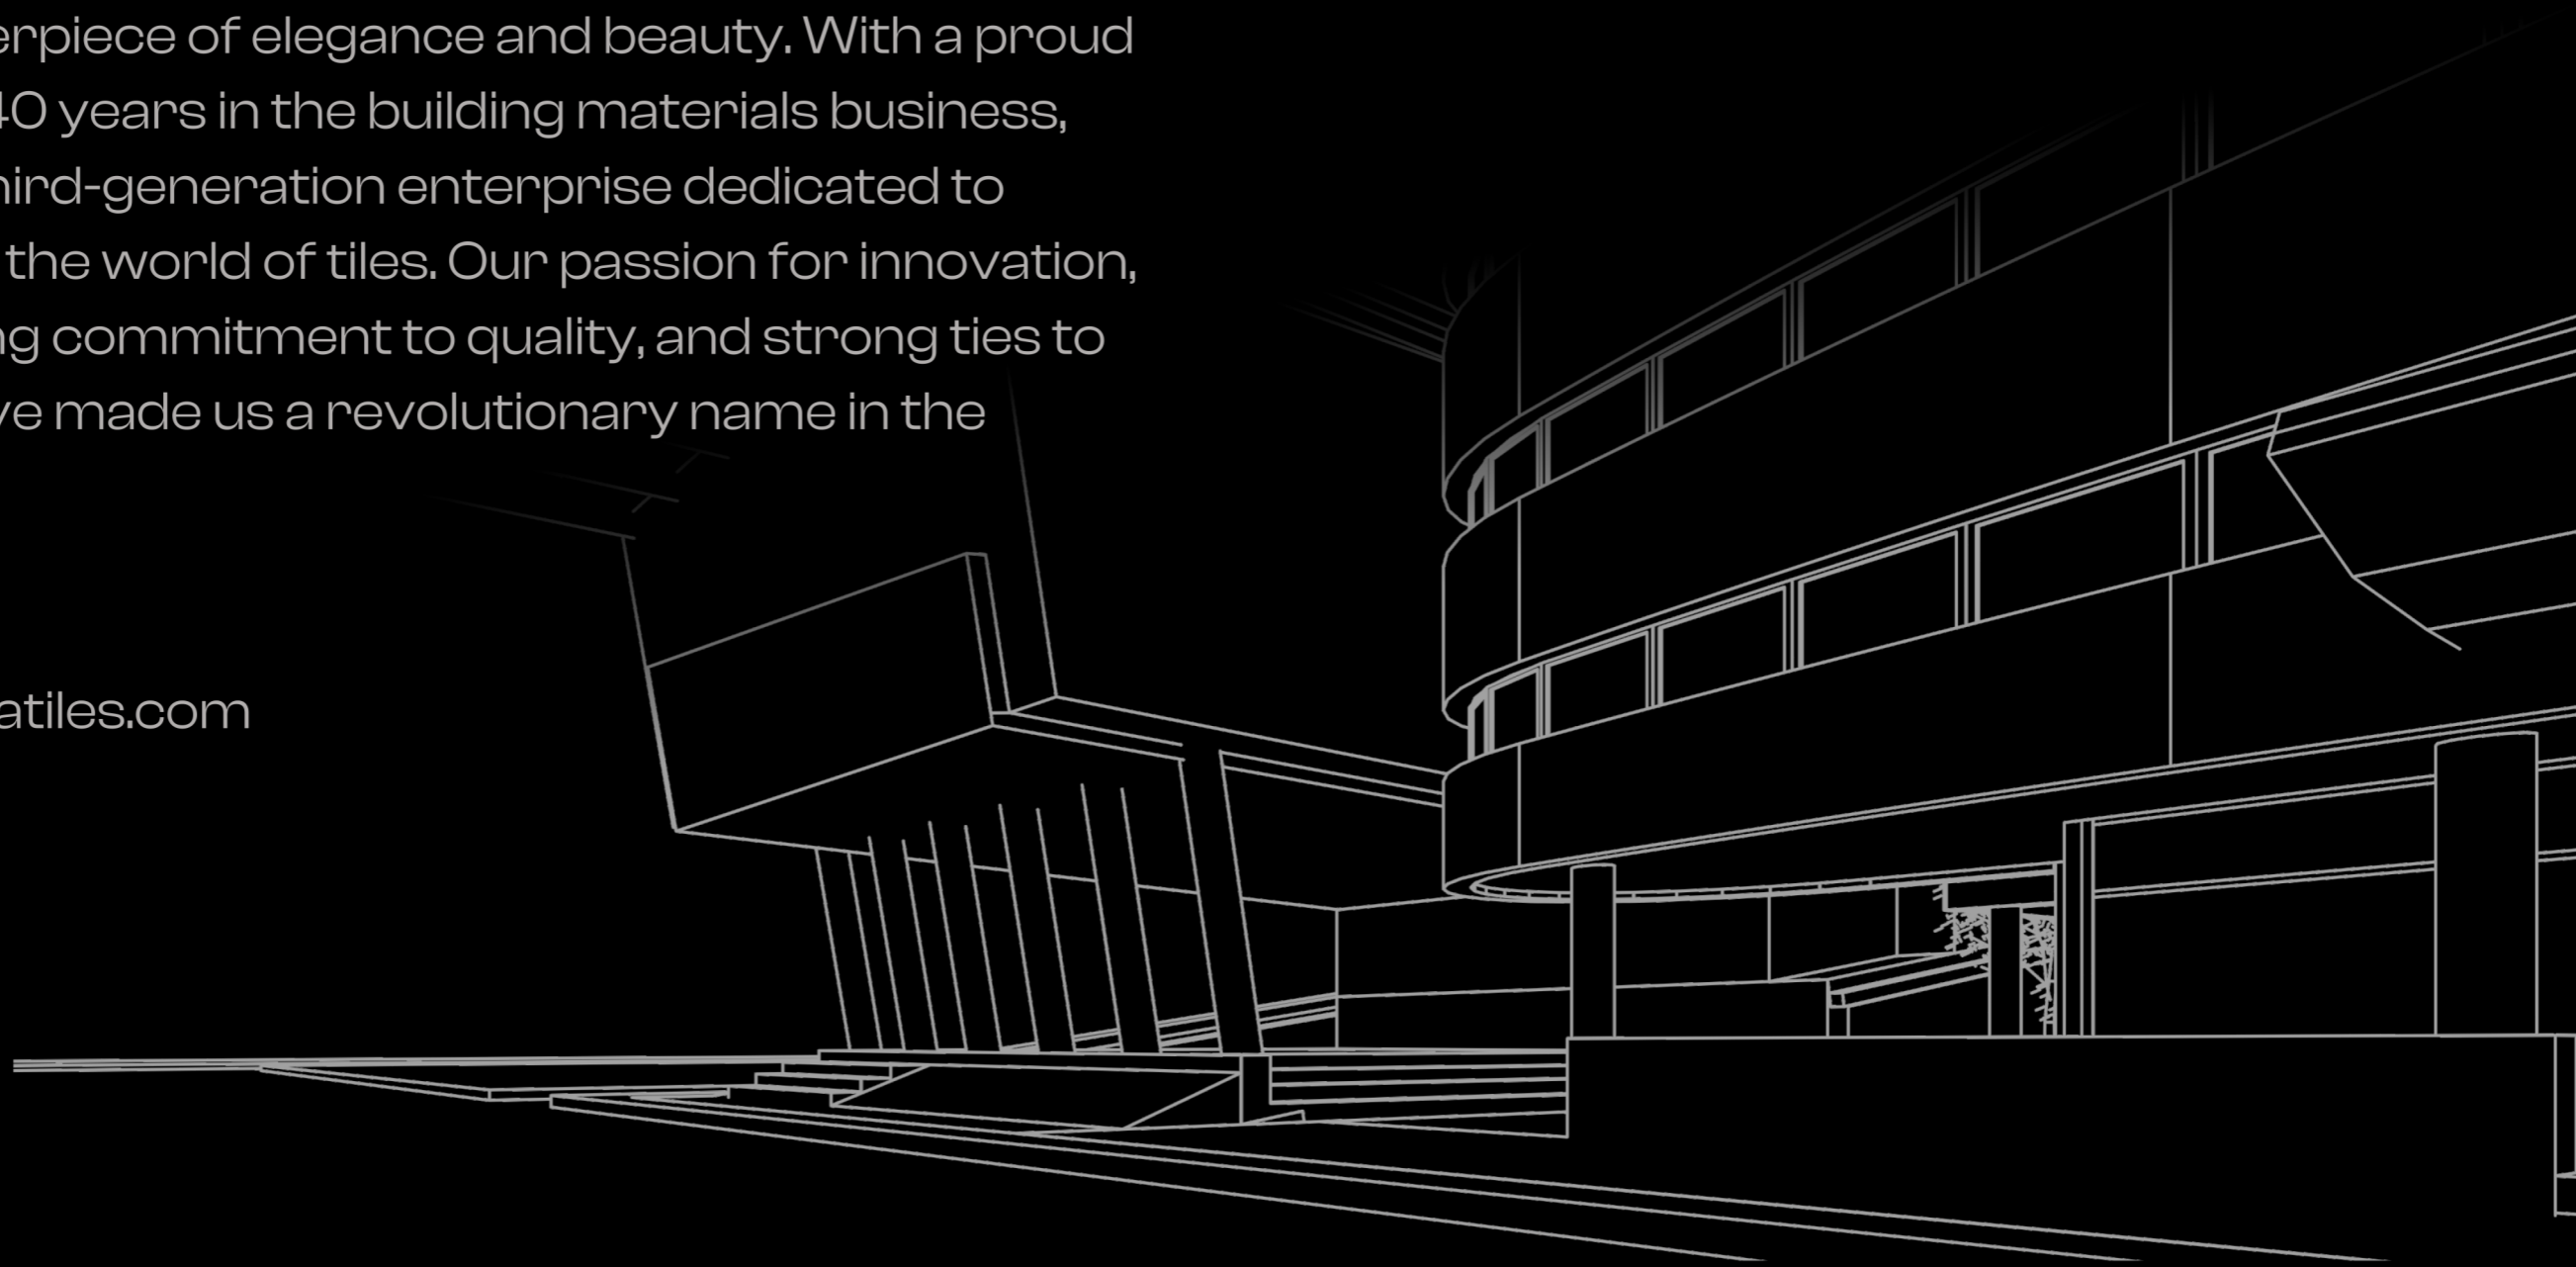

WOODS OOOZE ALL



NATURE

YARRA

FIND  
CREATIVITY  
FROM BASICS.

NATURE OOZES

WOODS.

ITS  
ASTONE  
PINE



YARRA

SILVER

PINE



YARRA

# ASTONE SILVER

200X  
1200MM

RANDOM  
9

PHASE  
1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

[www.geogres.in](http://www.geogres.in)



PHASE - 9



# ASTONE SILVER

200X  
1200MM

RANDOM  
9





YARRA

# ASTONE PINE

200X  
1200MM

RANDOM  
9

PHASE  
1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

[www.geogres.in](http://www.geogres.in)



PHASE - 9




# ASTONE PINE

200X  
1200MM

RANDOM  
9



## LAYING SOLUTIONS

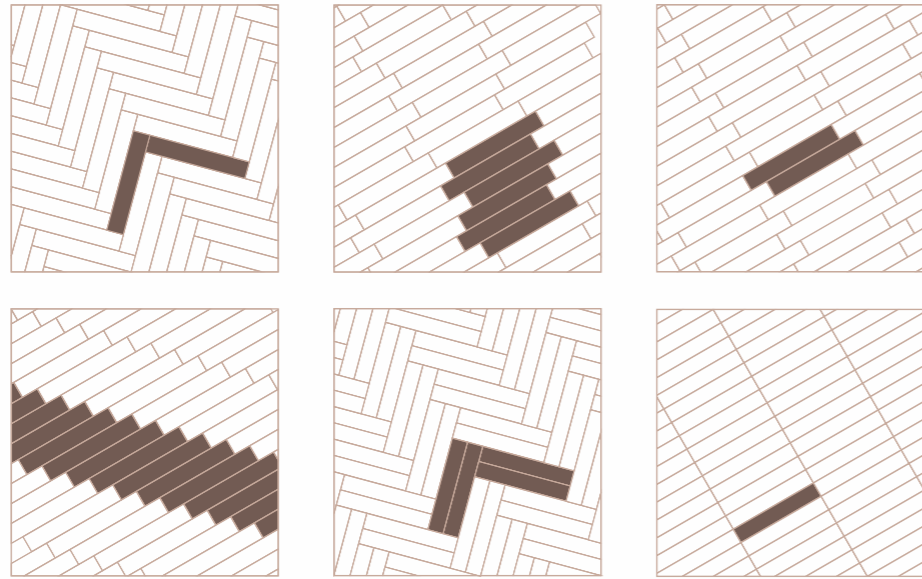

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


## PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	$\pm 0,3\%$ , max 1 mm	In According	
		Thickness	$\pm 5\%$ , max 0,5 mm	In According	
		Wedging	$\pm 0,3\%$ , max 1,5 mm	In According	
		Straightness of the edges	$\pm 0,3\%$ , max 0,8 mm	In According	
		Flatness	$\pm 0,4\%$ , max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	$\leq 0,5\%$	In According	
		Breaking strength	$S \geq 1300$ N	$S \geq 2000$ N	
		Modulus of rupture	$R \geq 35$ N/mm <sup>2</sup>	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	$9 \times 10^{-5}$ max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9/R11*
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



# YARRA

## INSTALLATION ADVICE

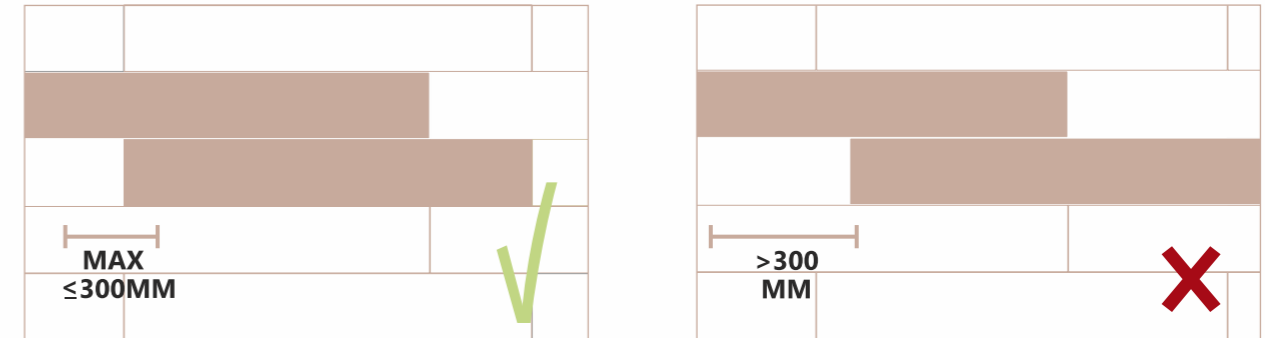

The longest side should be staggered no more than 300mm when laid in running bond.

## V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

## PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

## FEATURES



# YARRA

A Marble Mart Company.  
Asola Farm Rd, Asola Homes, Asola,  
New Delhi, Delhi 110074  
**Contact : 9911097882**

[www.yarratiles.com](http://www.yarratiles.com)  
[yarratiles@gmail.com](mailto:yarratiles@gmail.com)