


YARRA



2024-25
Collection

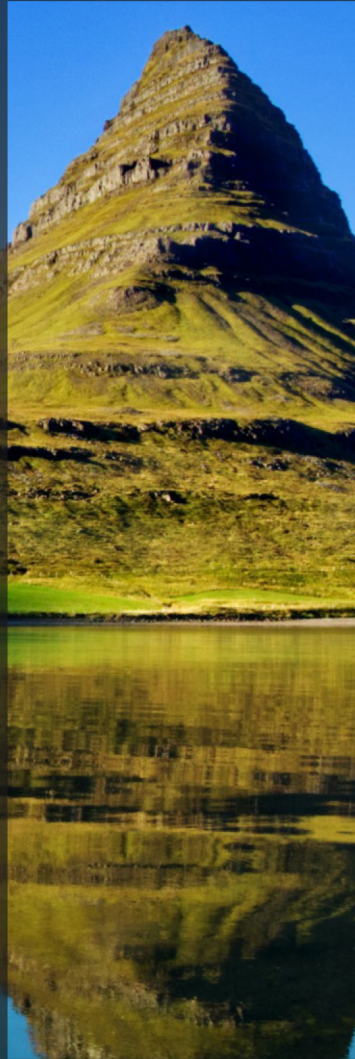

BRICOLA

SERIES



by


YARRA

About Us

YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

www.yarratiles.com

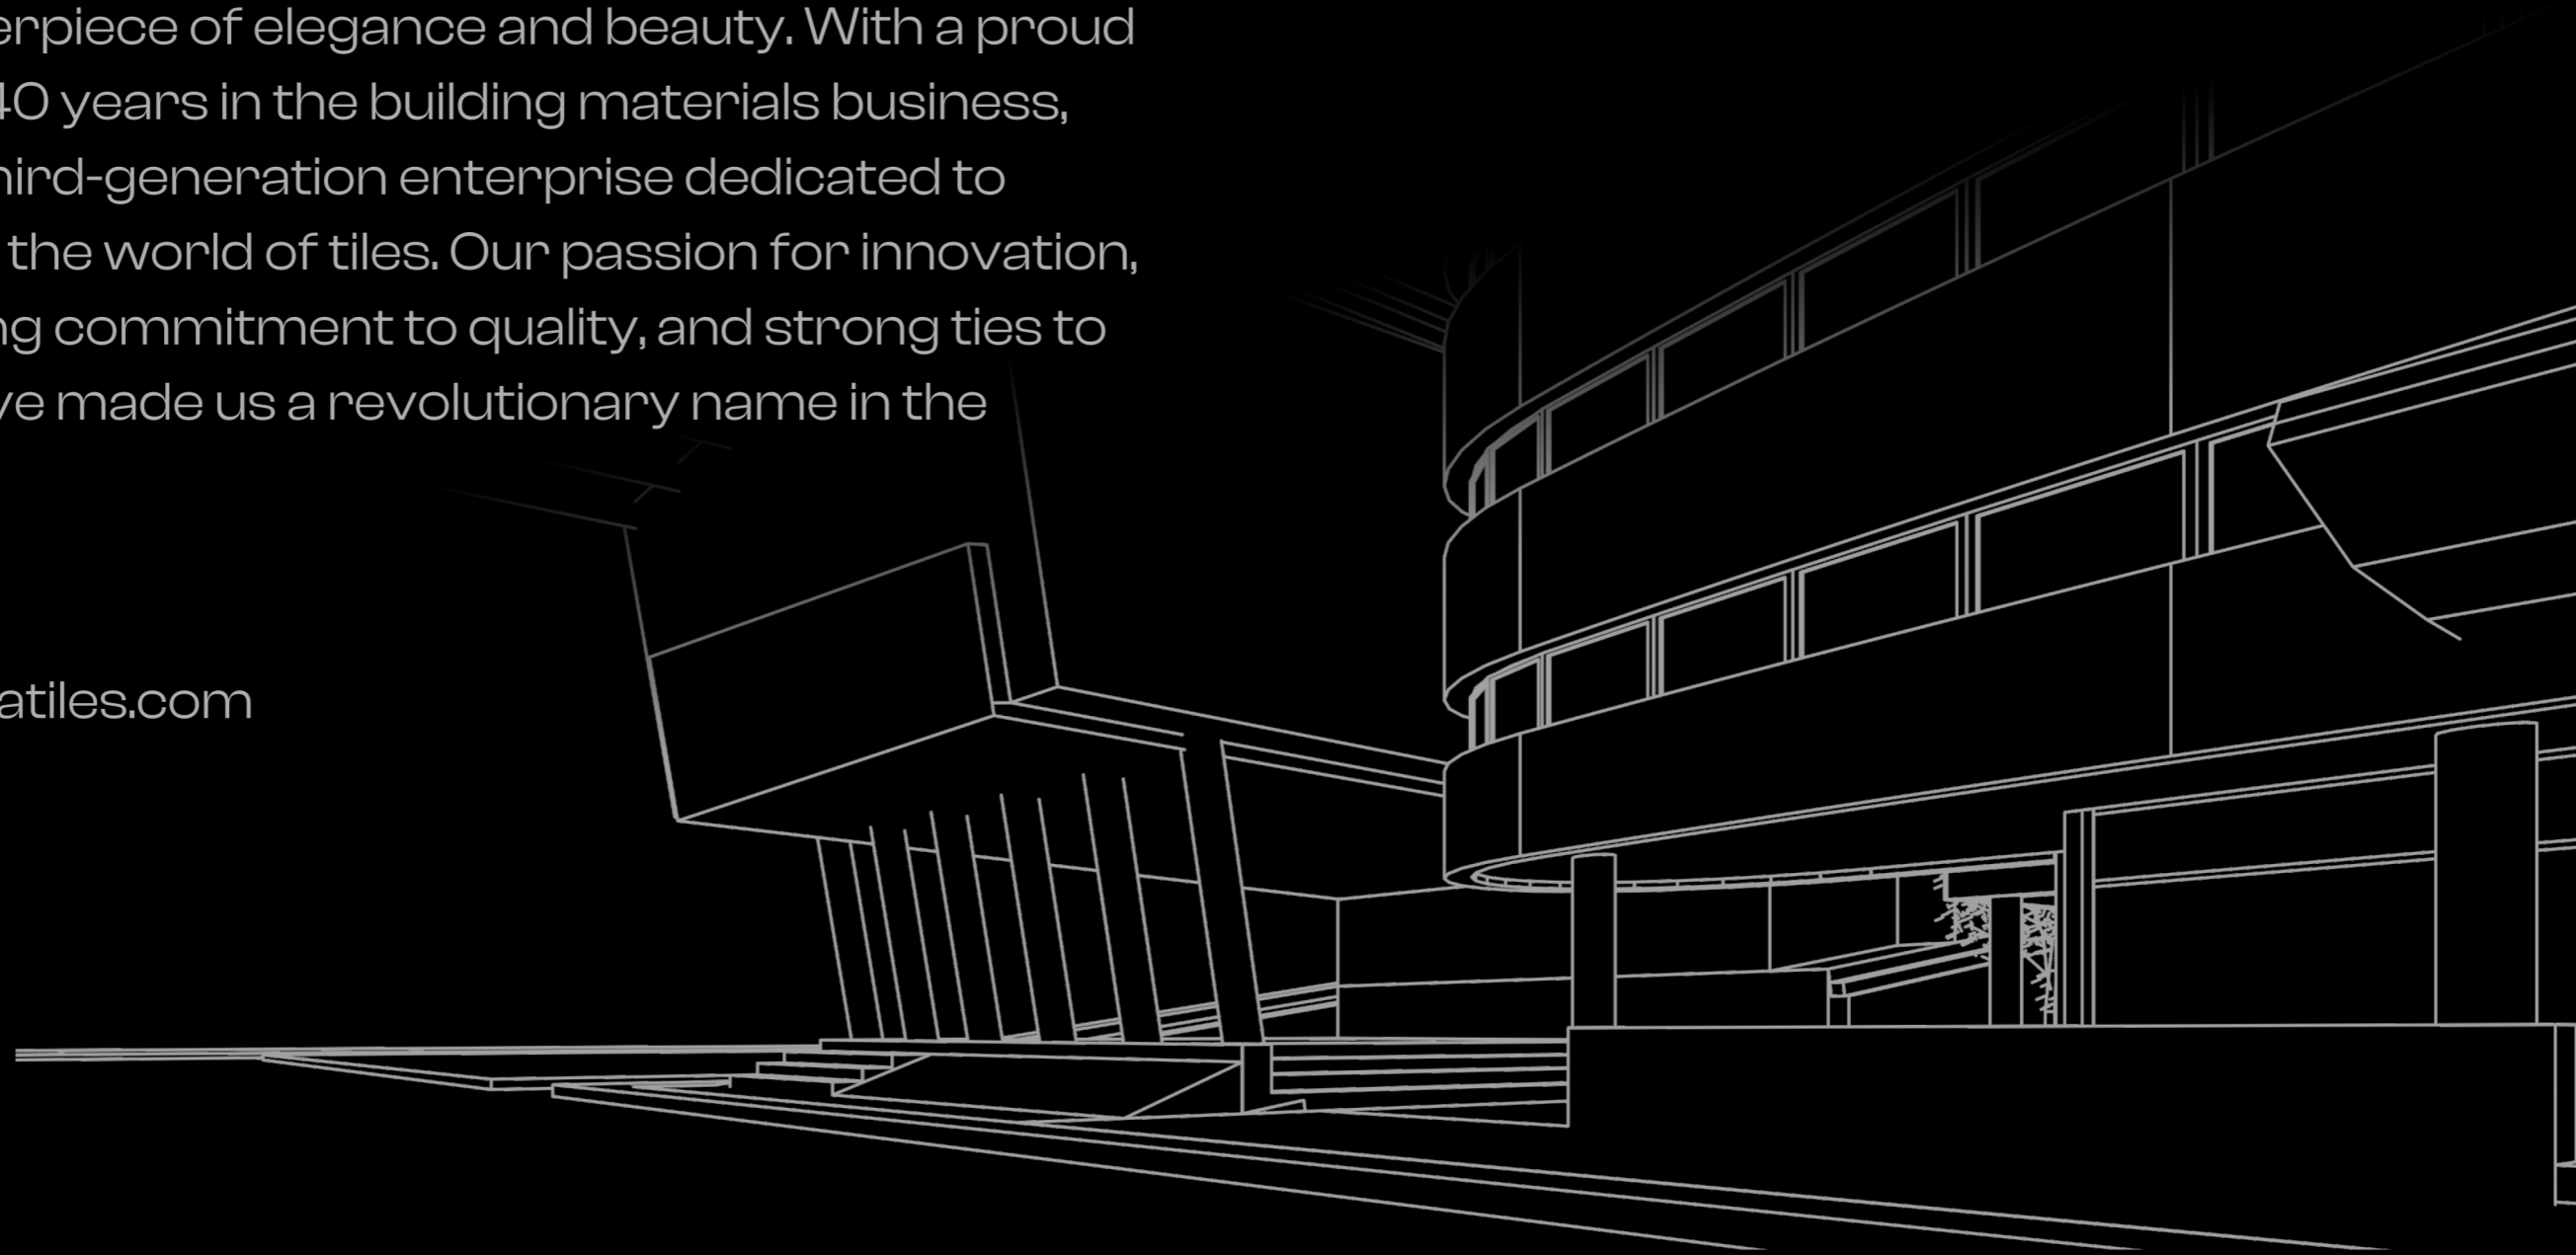

WOODS FOR ALL



YARRA

LIVING

FIND
CREATIVITY
FROM BASICS.

ALL
LIVING

FOR WOODS.



ITS
BRICOLA
GRIS

YARRA

CEREZO

SILVER

GRIS

TAN

BROWN

BRICOLA CEREZO

200X
1200MM

RANDOM
9

PHASE
1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





BRICOLA **CEREZO**

200X
1200MM

RANDOM
9

BRICOLA SILVER

200X
1200MM

RANDOM
9

PHASE
1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





BRICOLA  **SILVER**

200X
1200MM

RANDOM
9

BRICOLA GRIS

200X
1200MM

RANDOM
9

PHASE
1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





BRICOLA  **GRIS**

200X
1200MM

RANDOM
9

BRICOLA Δ TAN

200X
1200MM

RANDOM
9

PHASE
1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





BRICOLA Δ **TAN**

200X
1200MM

RANDOM
9

BRICOLA BROWN

200X
1200MM

RANDOM
9

PHASE
1



PHASE - 2




PHASE - 3



PHASE - 4



PHASE - 5

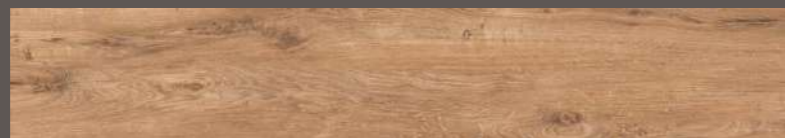

PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9






BRICOLA  **BROWN**

200X
1200MM

RANDOM
9

LAYING SOLUTIONS

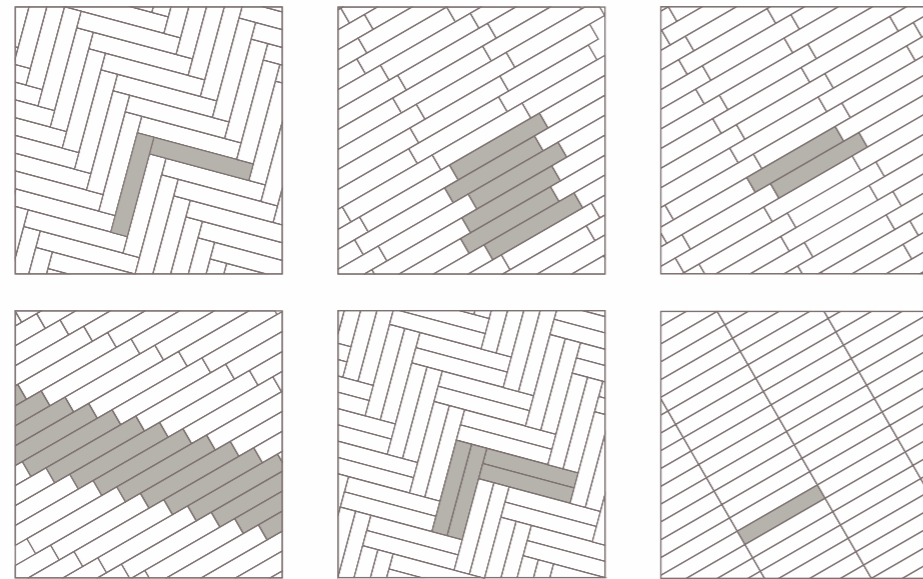

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	$\pm 0,3\%$, max 1 mm	In According	
		Thickness	$\pm 5\%$, max 0,5 mm	In According	
		Wedging	$\pm 0,3\%$, max 1,5 mm	In According	
		Straightness of the edges	$\pm 0,3\%$, max 0,8 mm	In According	
		Flatness	$\pm 0,4\%$, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	$\leq 0,5\%$	In According	
		Breaking strength	$S \geq 1300$ N	$S \geq 2000$ N	
		Modulus of rupture	$R \geq 35$ N/mm ²	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	9×10^{-5} max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9/R11*
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5




YARRA

INSTALLATION ADVICE

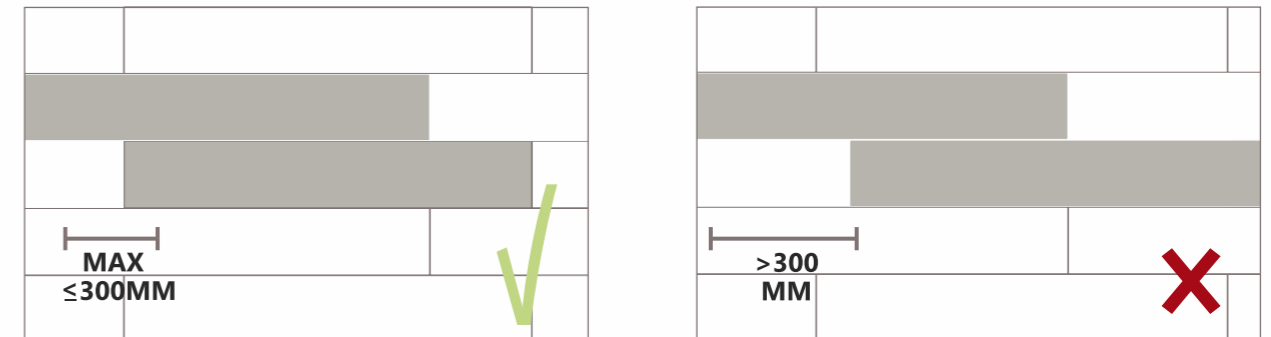

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES

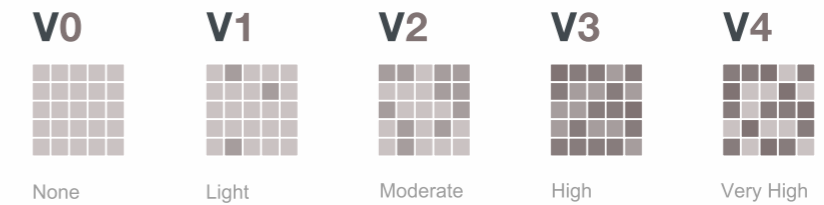

The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



YARRA

A Marble Mart Company.
Asola Farm Rd, Asola Homes, Asola,
New Delhi, Delhi 110074
Contact : 9911097882

www.yarratiles.com
yarratiles@gmail.com