


YARRA



2024-25
Collection

www.yarratiles.com

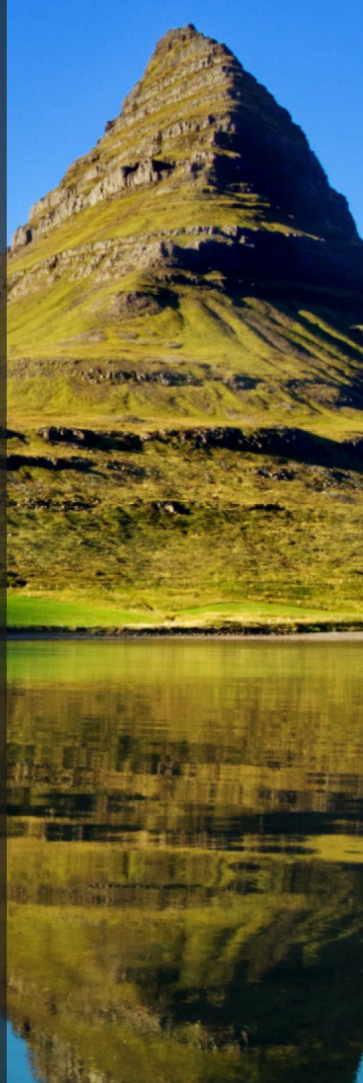

200 X
1200MM
WOODS

by

YARRA



BOSCO


Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.

About Us

YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

www.yarratiles.com

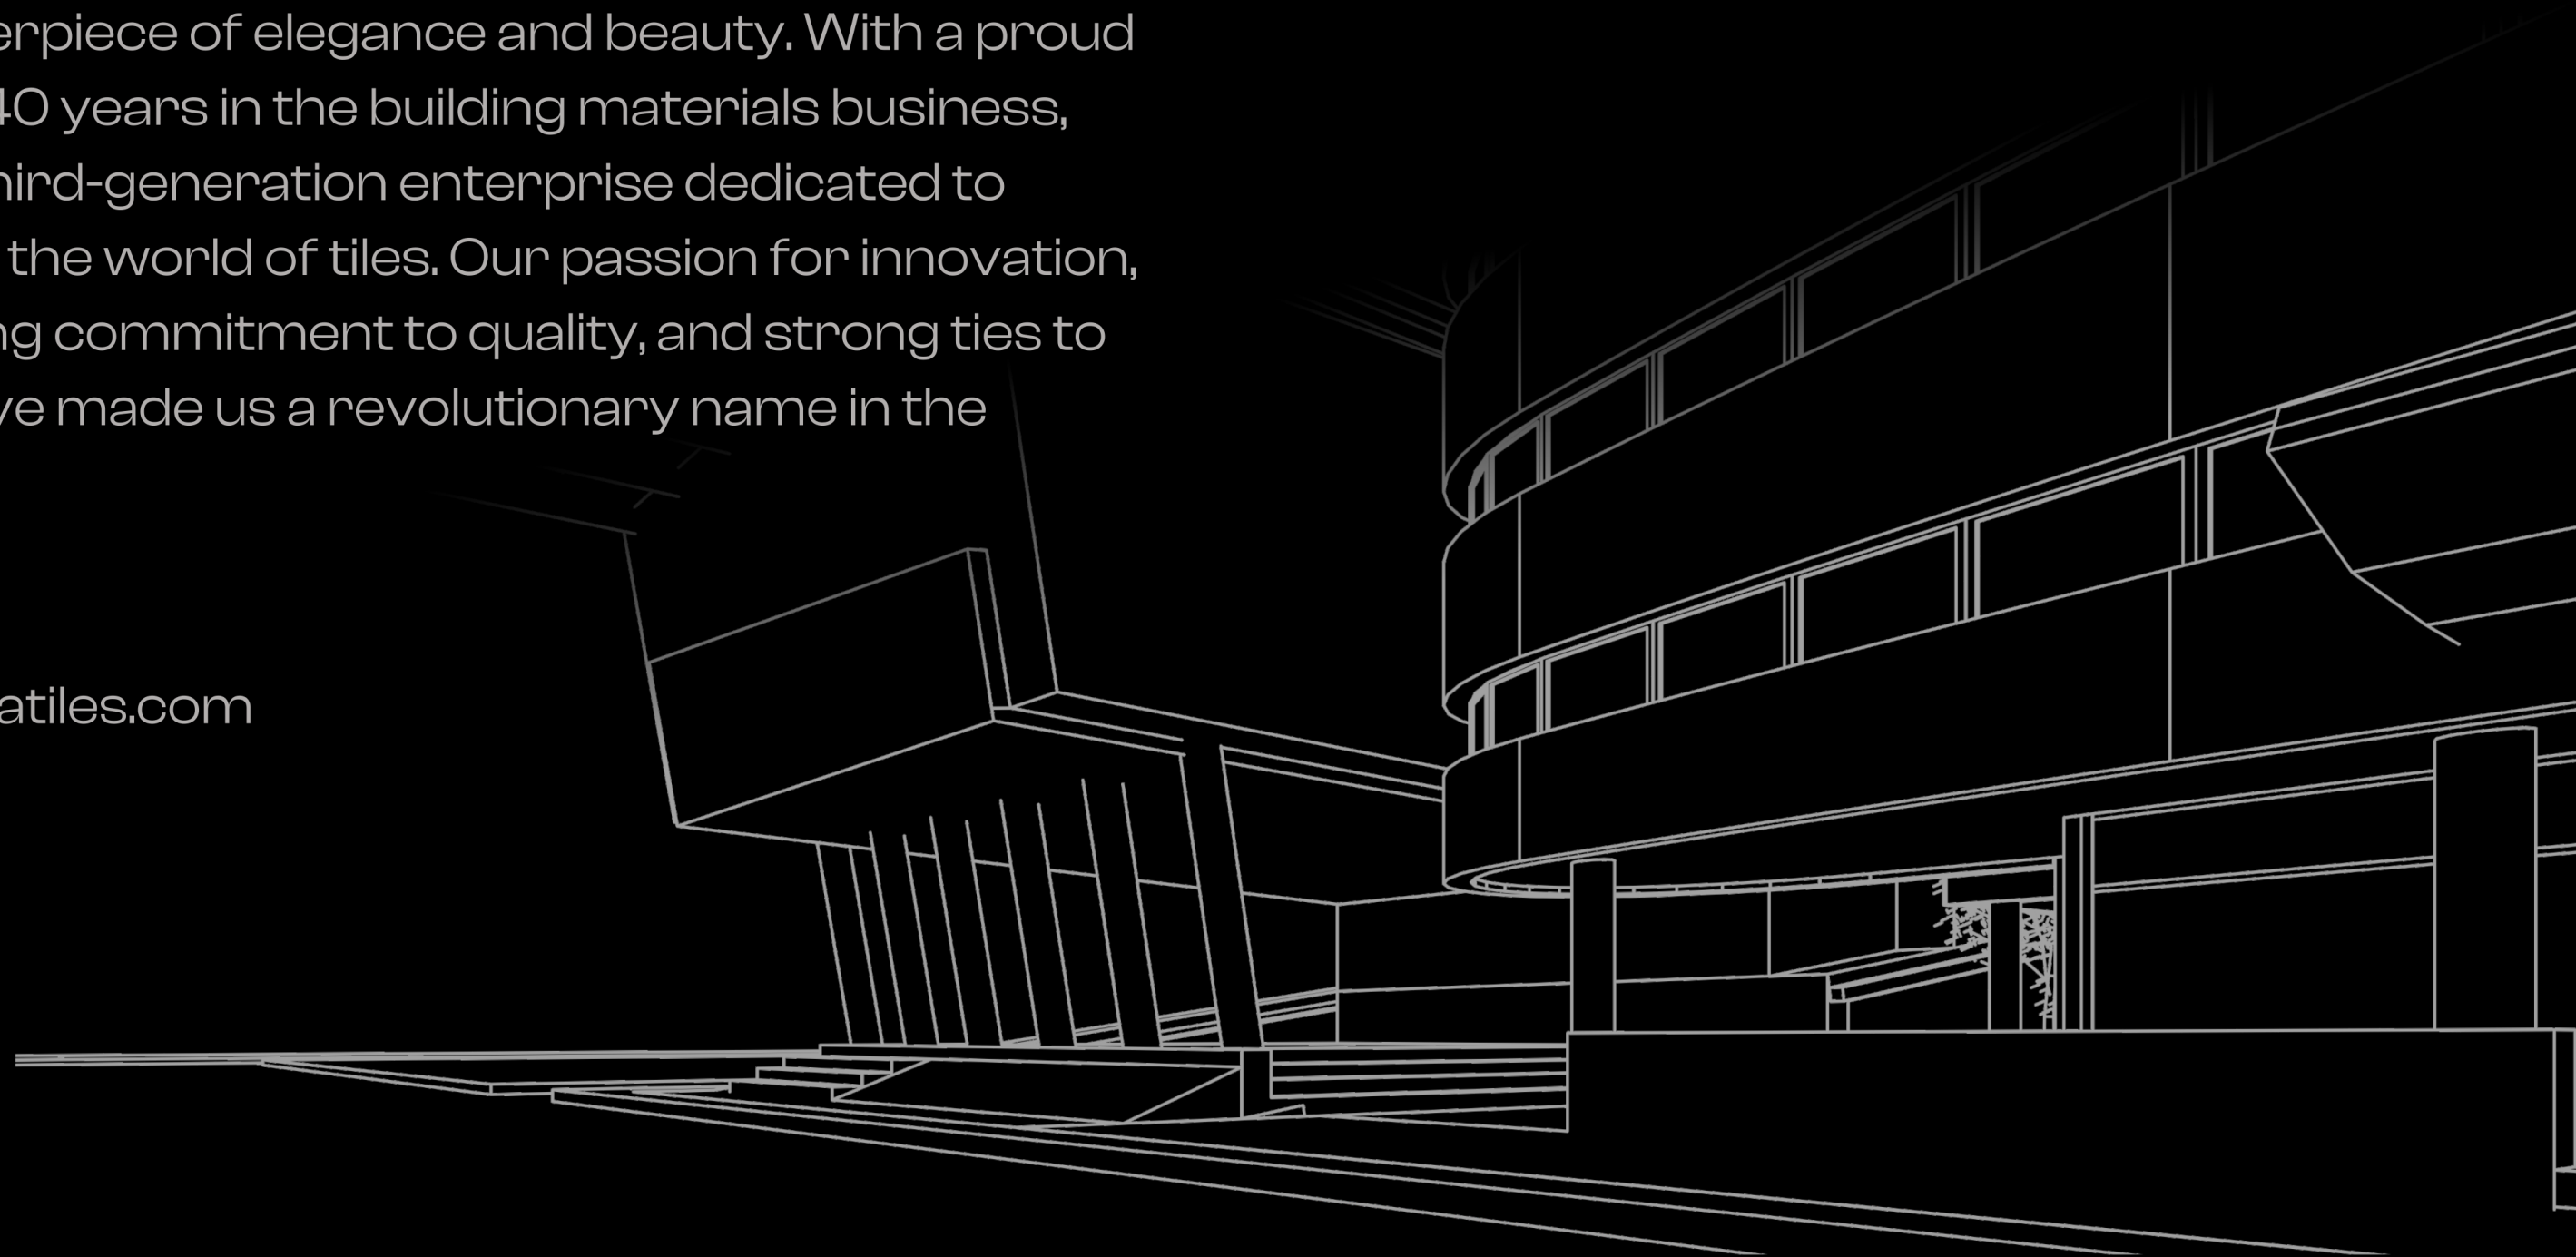



creativity
for your
kitchen &
living

COLORS

IVORY




TEAK



BEIGE



BROWN

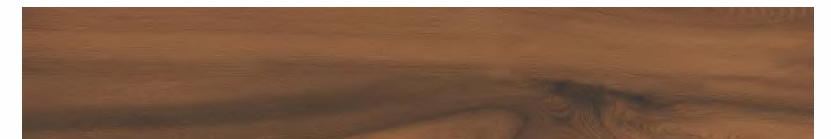

LIGHT GRAY



DARK GRAY



GRAY




YARRA

YARRA

BOSCO
IVORY



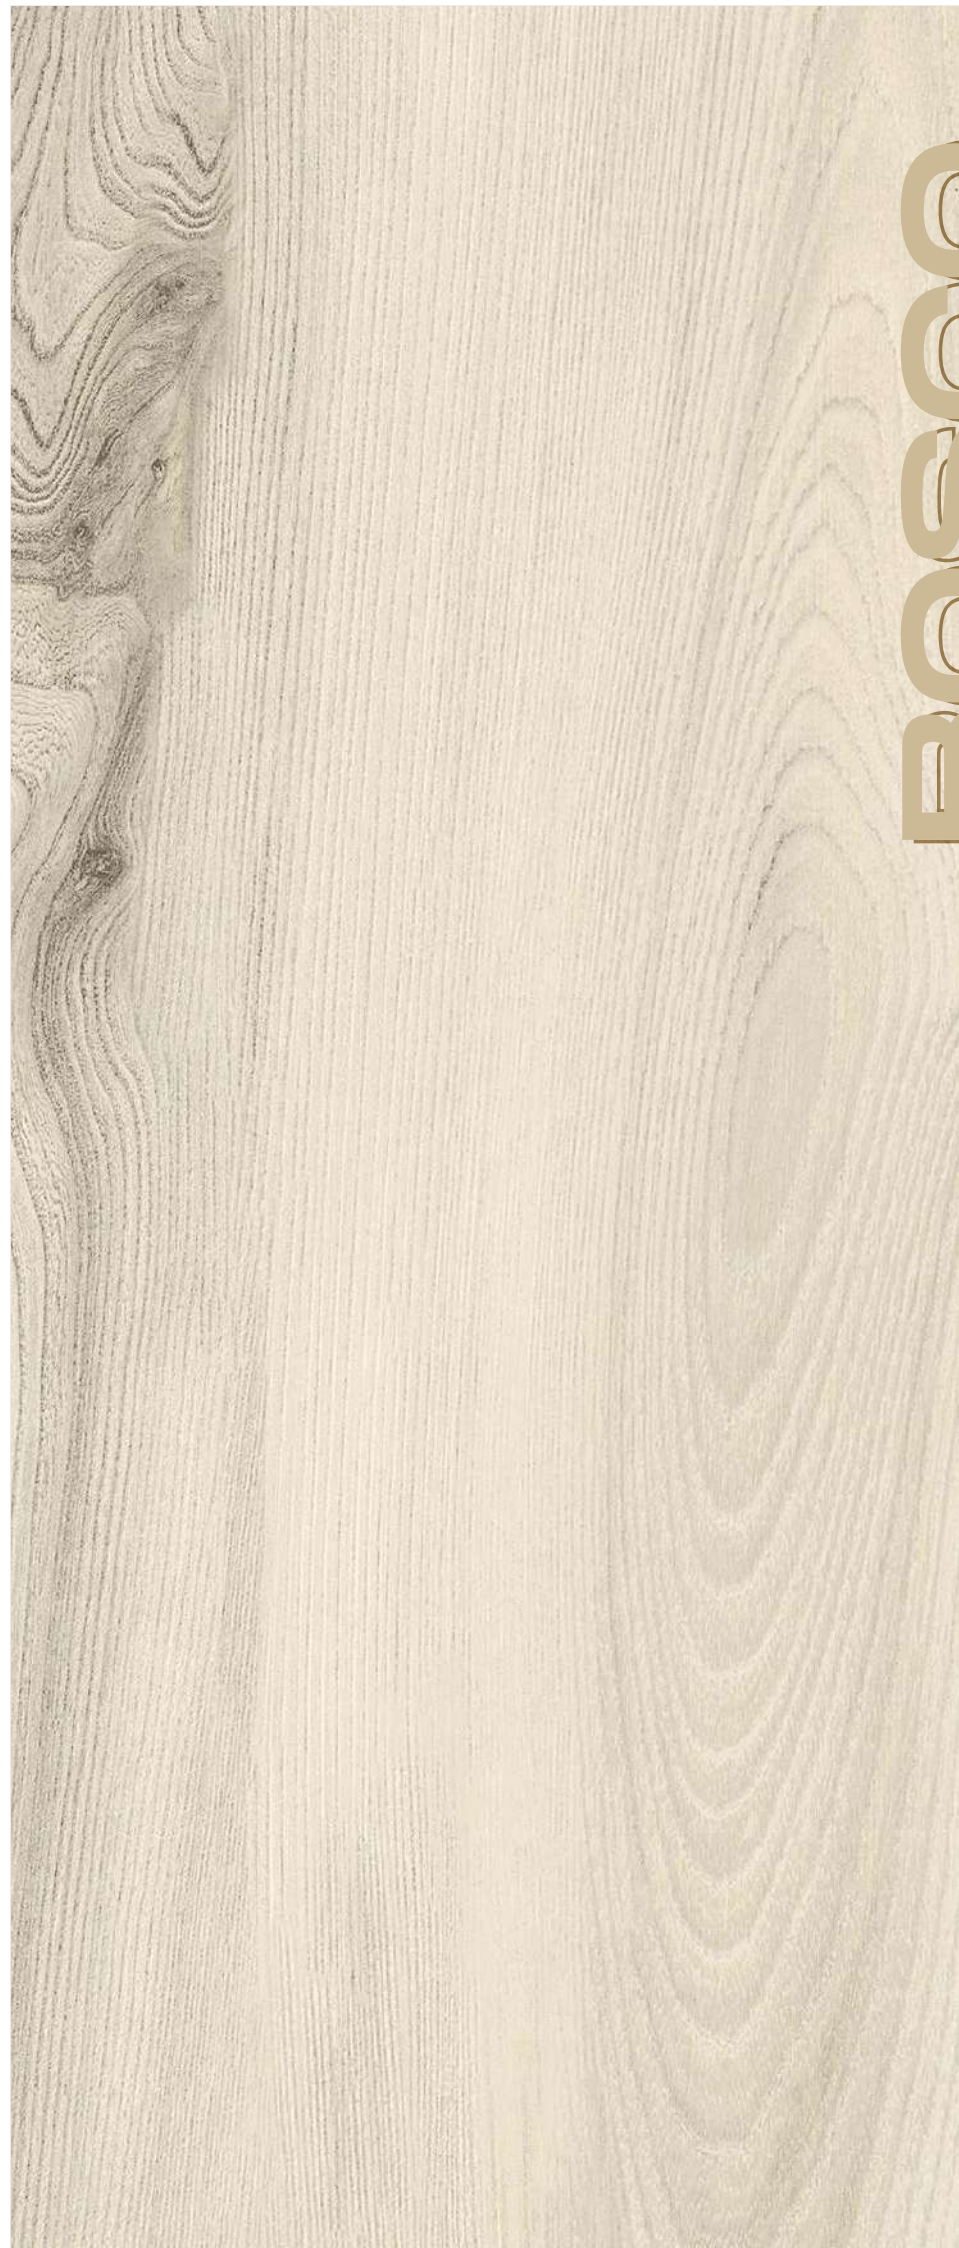

BOSOO IVORY

**200X
1200MM**

RANDOM - 8



MATT



RELIEF



RECTIFIED



9 MM



R9/R11*



V1



2 MM



DO NOT LOCK
1/2 PIECE



YARRA



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5




PHASE - 6

PHASE - 7



PHASE - 8

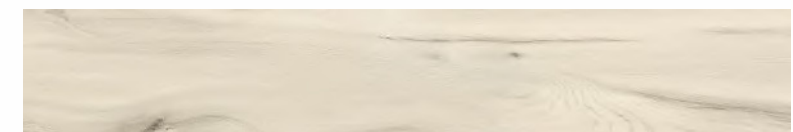

YARRA

**BOSCO
TEAK**



BOSOO TTEAK

**200X
1200MM**

RANDOM - 8



MATT



RELIEF



RECTIFIED



9 MM



R9/R11*



V1



2 MM



DO NOT LOCK
1/2 PIECE



YARRA



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7




PHASE - 8



YARRA

**BOSCO
BEIGE**

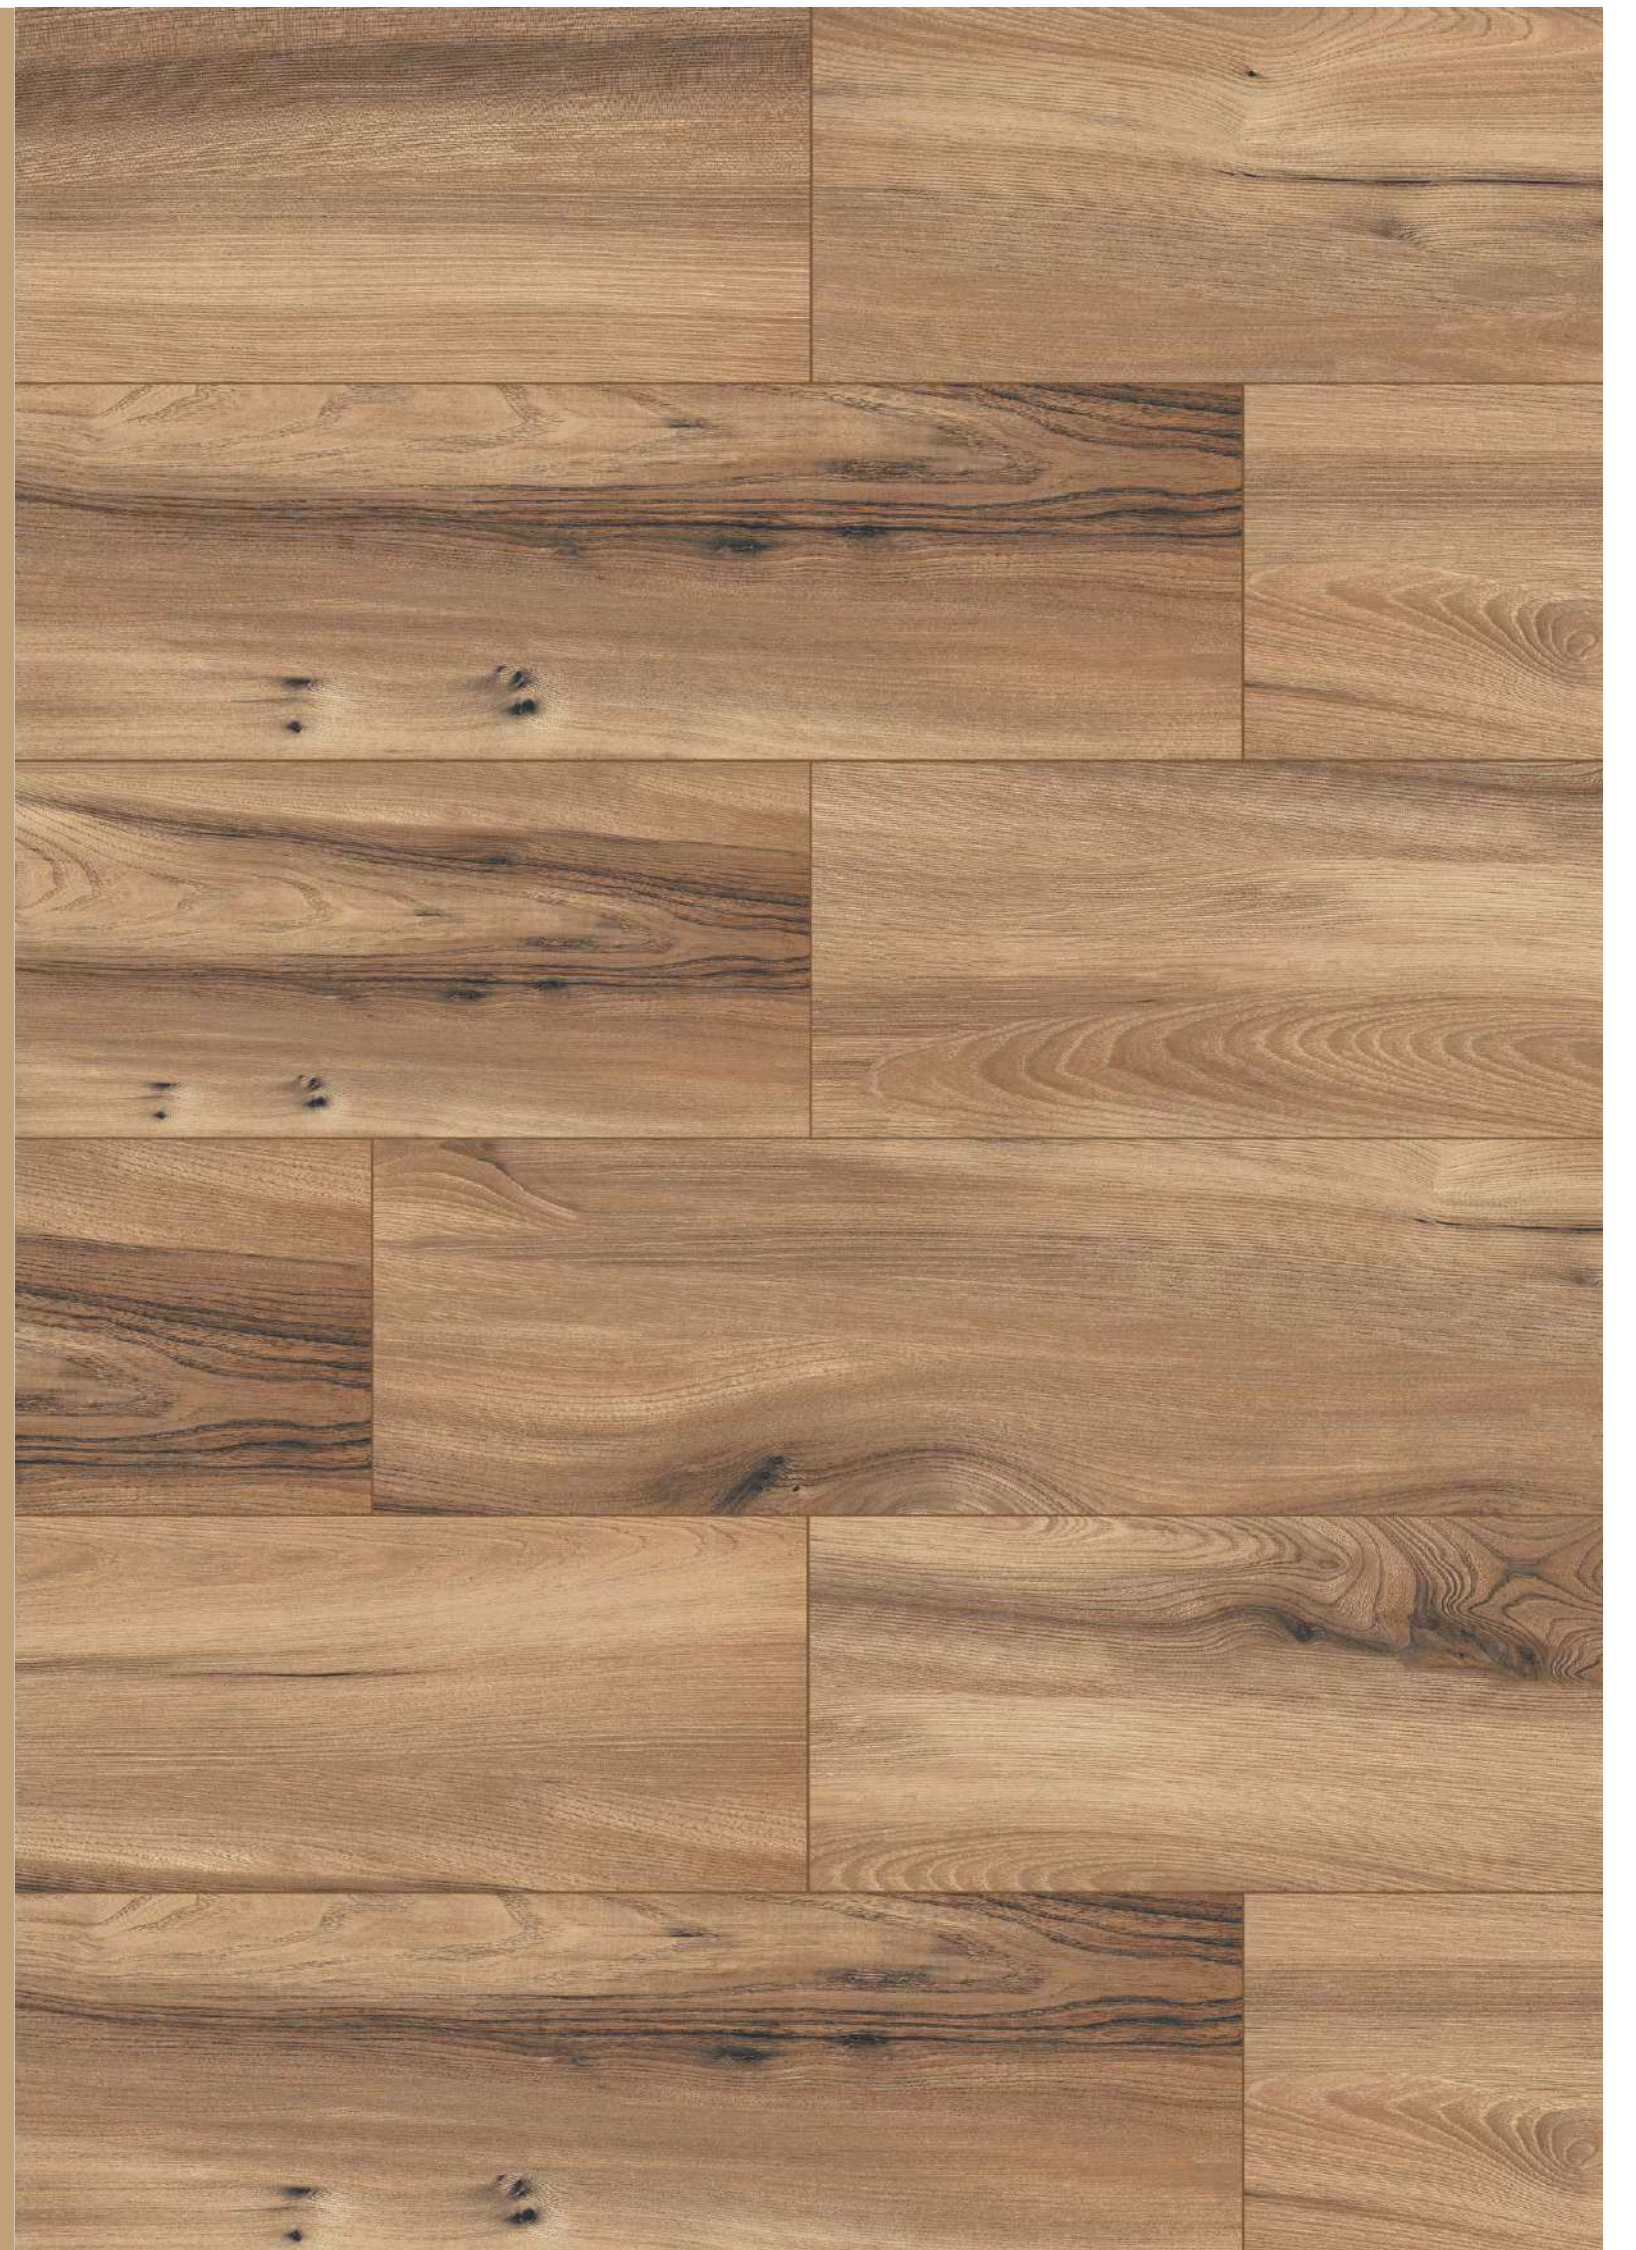



BOSSO BEIGE

**200X
1200MM**

RANDOM - 8



MATT



RELIEF



RECTIFIED



9 MM



R9/R11*



V1



2 MM



DO NOT LOCK
1/2 PIECE



YARRA



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7



PHASE - 8






**BOSCO
BEIGE**



YARRA

YARRA

**BOSCO
BROWN**

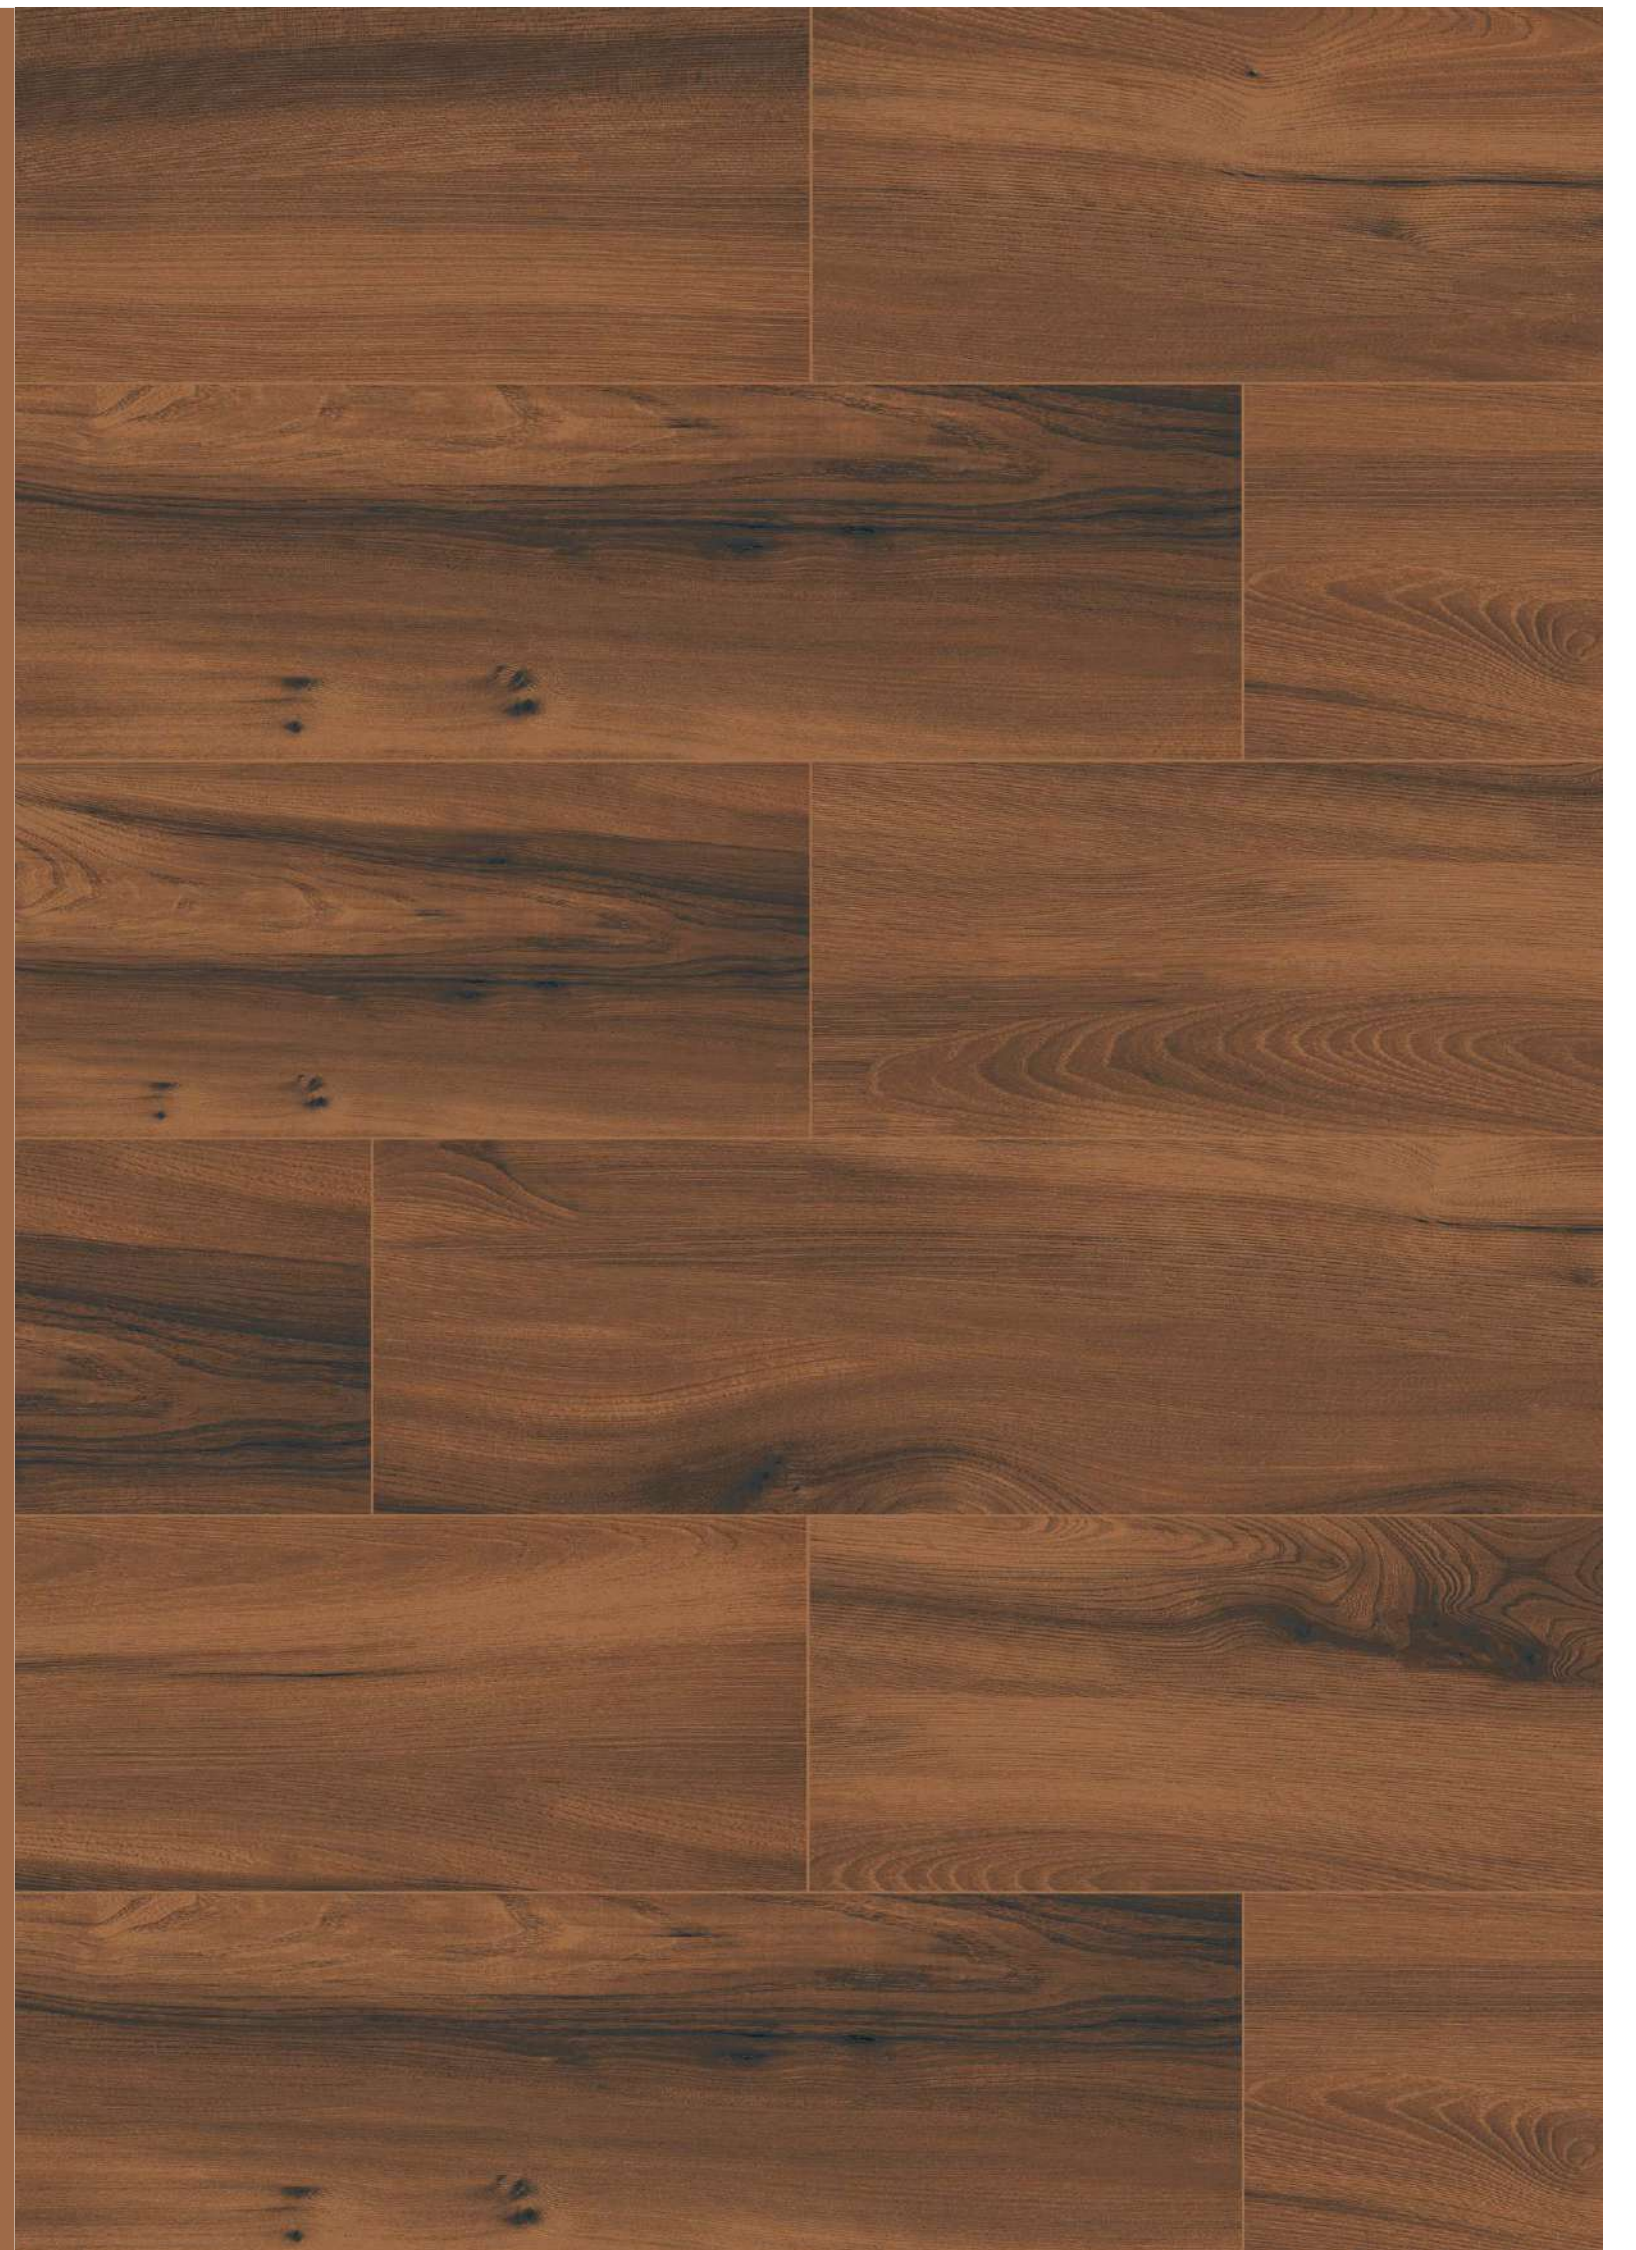

BOSCO BROWN

**200X
1200MM**

RANDOM - 8



MATT



RELIEF



RECTIFIED



9 MM



R9/R11*



V1



2 MM



DO NOT LOCK
1/2 PIECE



YARRA



PHASE - 1




PHASE - 2

PHASE - 3



PHASE - 4

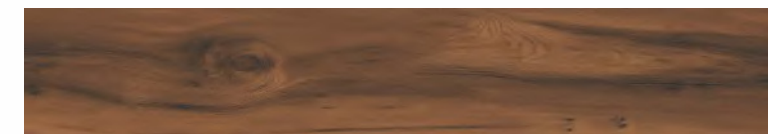

PHASE - 5



PHASE - 6

PHASE - 7




PHASE - 8



YARRA

BOSCO
LIGHT GREY



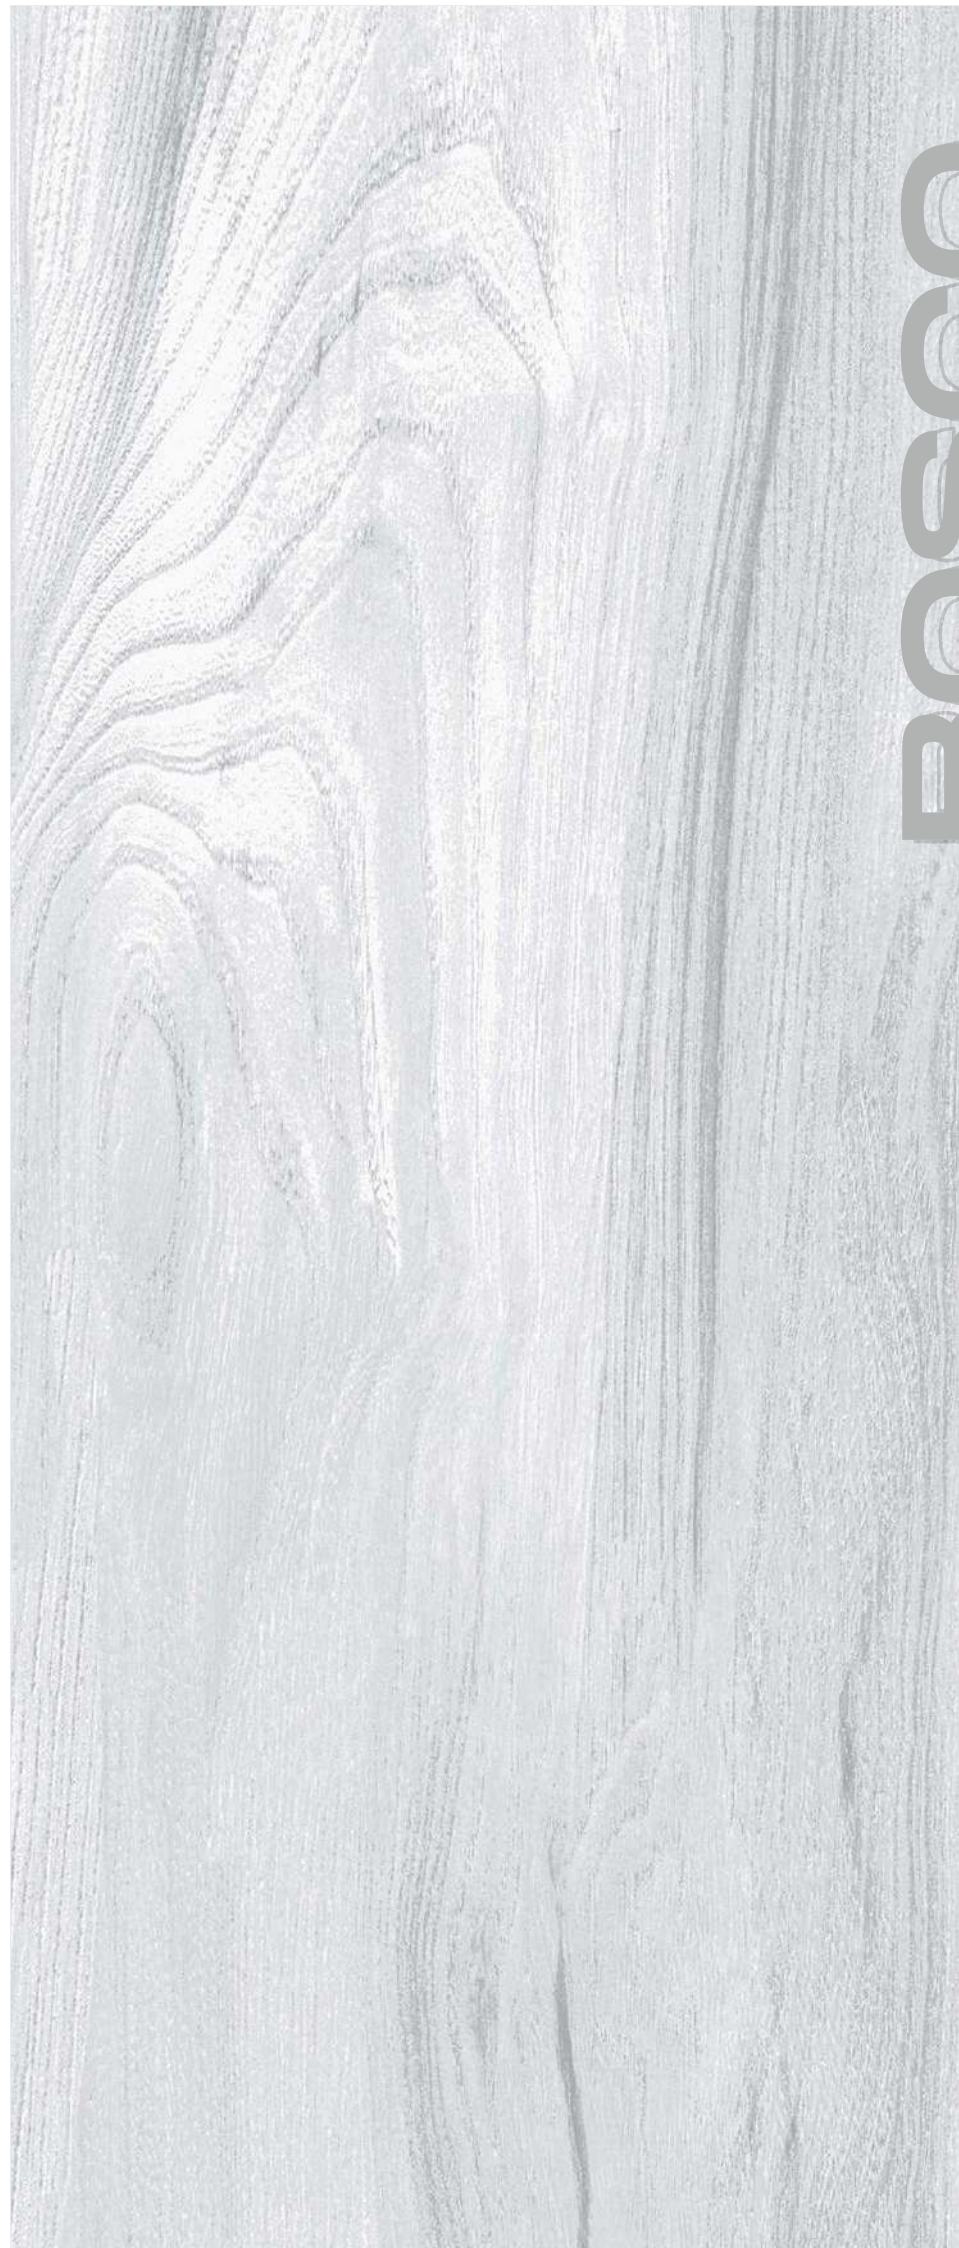

BOSOO LIGHT GREY

**200X
1200MM**

RANDOM - 8



MATT



RELIEF



RECTIFIED



9 MM



R9/R11*



V1



2 MM



DO NOT LOCK
1/2 PIECE



YARRA



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7



PHASE - 8




www.geogres.in

YARRA

BOSCO
DARK GREY



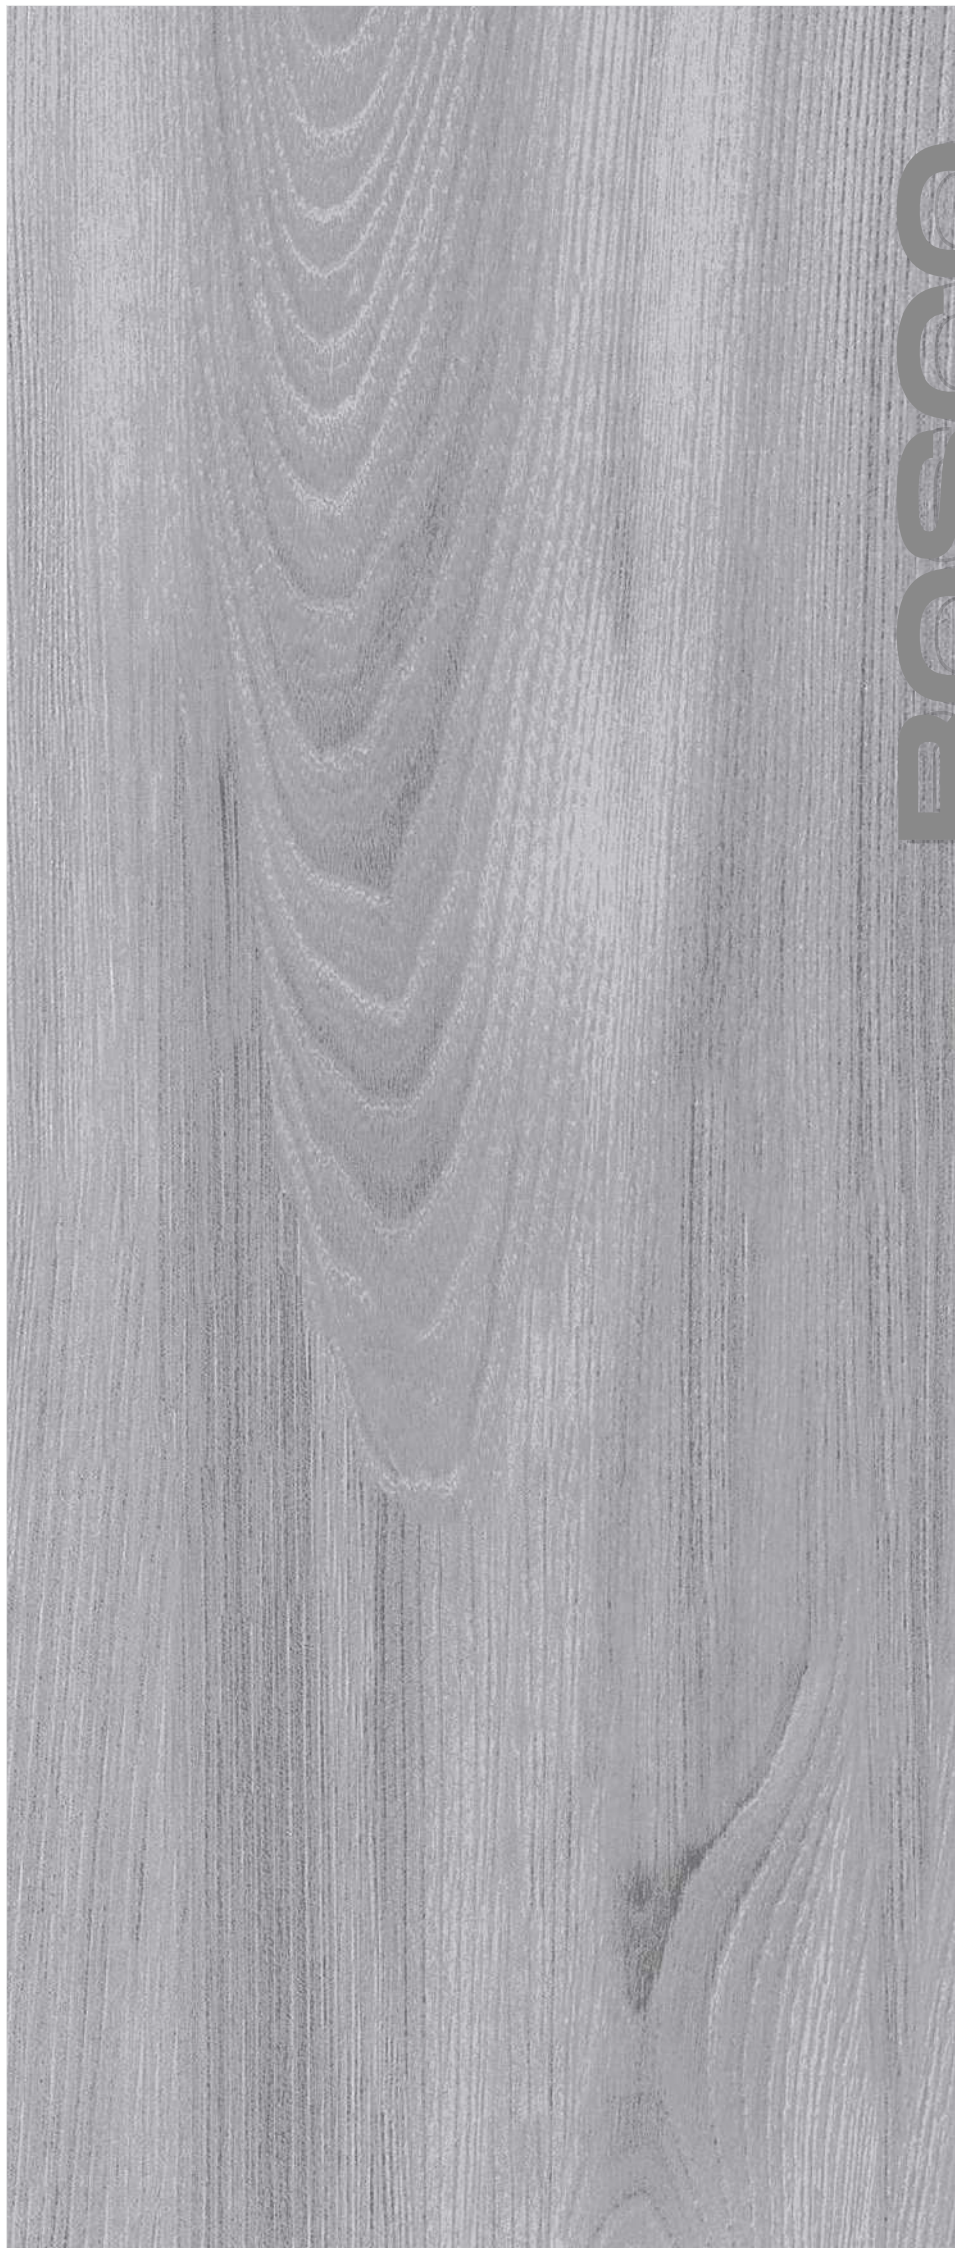

BOSOO DARK GREY

**200X
1200MM**

RANDOM - 8



MATT



RELIEF



RECTIFIED



9 MM



R9/R11*



V1



2 MM



DO NOT LOCK
1/2 PIECE



YARRA



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7



PHASE - 8



www.geogres.in

YARRA

BOSCO
GREY



BOSCO GREY

**200X
1200MM**

RANDOM - 8



MATT



RELIEF



RECTIFIED



9 MM



R9/R11*



V1



2 MM



DO NOT LOCK
1/2 PIECE



YARRA



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7



PHASE - 8



www.geogres.in




**BOSCO
GREY**



YARRA

LAYING SOLUTIONS

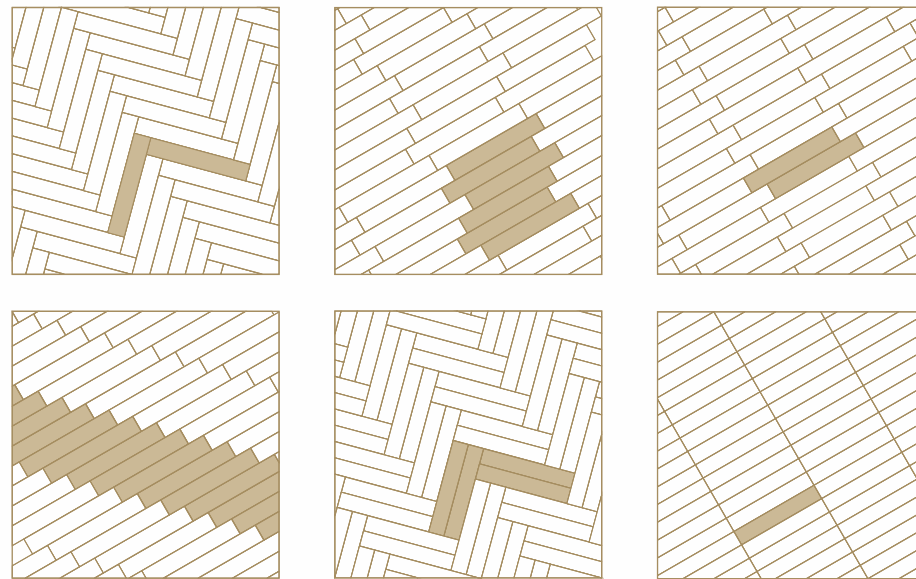


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group BIa, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	≤ 0,5%	In According	
		Breaking strength	S ≥ 1300 N	S ≥ 2000 N	
		Modulus of rupture	R ≥ 35 N/mm ²	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	9 x 10 ⁻⁶ max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	Class GHC Min.	Class GHA	
		Resistance to low concentrations of acids and alkalis	Class GLC Min.	Class GLA	
		Stain resistance	Min. class 3	5	



INSTALLATION ADVICE

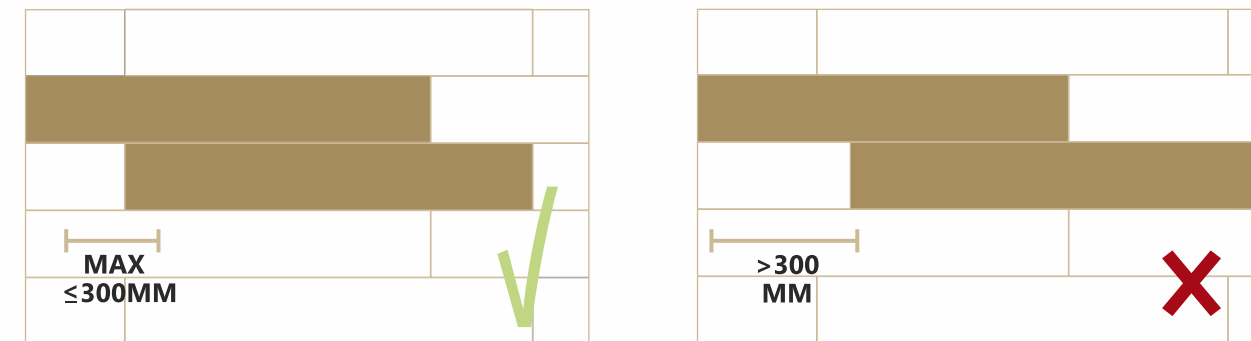

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



*We need minimum 2000sq/mtr order for R11 surface

YARRA

A Marble Mart Company.
Asola Farm Rd, Asola Homes, Asola,
New Delhi, Delhi 110074
Contact: 9911097882

www.yarratiles.com
yarratiles@gmail.com