


YARRA



2024-25
Collection

OTA DAKOTA DAKOTA DAKOTA DAKO
OTA DAKOTA DAKOTA DAKOTA DAKO
TA DAKOTA DAKOTA DAKOTA DAKOT
A DAKOTA DAKOTA DAKOTA DAKOTA
DAKOTA DAKOTA DAKOTA DAKOTA
DAKOTA DAKOTA DAKOTA DAKOTA D
AKOTA DAKOTA DAKOTA DAKOTA D
AKOTA DAKOTA DAKOTA DAKOTA DA
KOTA DAKOTA DAKOTA DAKOTA DAI
KOTA DAKOTA DAKOTA DAKOTA DAK
OTA DAKOTA DAKOTA DAKOTA DAKC
TA DAKOTA DAKOTA DAKOTA DAKOT
A DAKOTA DAKOTA DAKOTA DAKOTA
DAKOTA DAKOTA DAKOTA DAKOTA
DAKOTA DAKOTA DAKOTA DAKOTA
DAKOTA DAKOTA DAKOTA DAKOTA D
AKOTA DAKOTA DAKOTA DAKOTA DA
KOTA DAKOTA DAKOTA DAKOTA DA
KOTA DAKOTA DAKOTA DAKOTA DAK
OTA DAKOTA DAKOTA DAKOTA DAKC

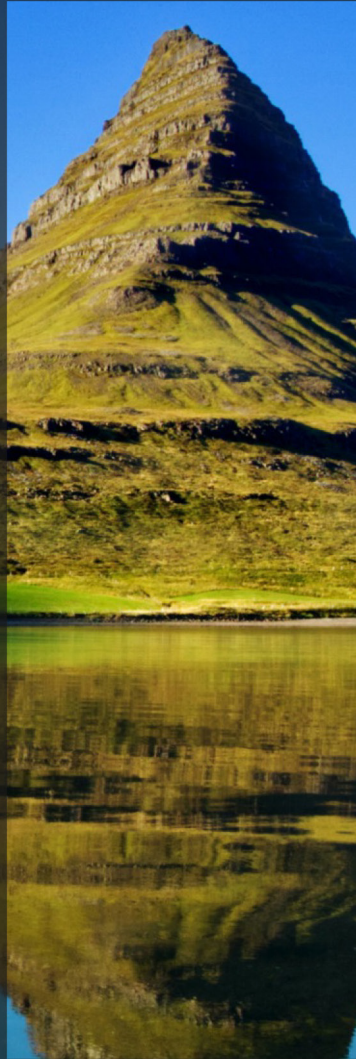

200X 1200MM

by

YARRA

About Us

YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

www.yarratiles.com



INNOVATION WITH NATURE

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.



-MAPLE-

-ASH-

-GRIS-

-NATURAL-

-WHITE OAK-

**200X
1200MM**

**200X
1200MM**

**200X
1200MM**

**200X
1200MM**

**200X
1200MM**

RANDOM

RANDOM

RANDOM

RANDOM

RANDOM

9

9

9


9

9

YARRA

MOOD SPACES

The emotion that only handmade things can offer blends with love for materials, respect for traditions and the continuous improvement resulting from masterful daily gestures. In the world of Arthis, past, present and future blend in a material that is full of life to offer a feeling of inspired contemporary craftsmanship to residential and commercial spaces.

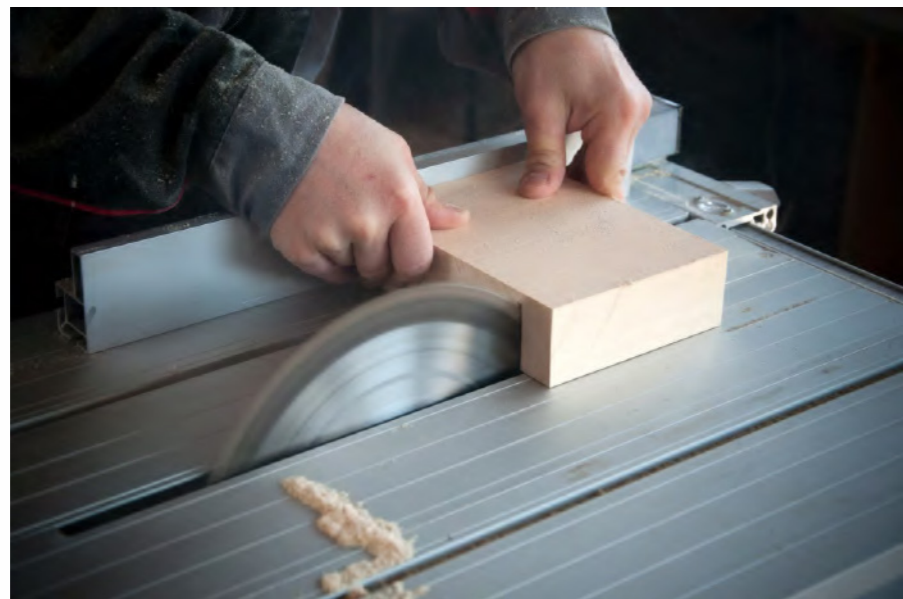

YARRA

DAKOTA WHITE OAK



200X
1200MM

RANDOM
10



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





DAKOTA WHITE OAK



YARRA

DAKOTA ASH



200X
1200MM

RANDOM
09



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





DAKOTA ASH



YARRA

DAKOTA GRIS



200X
1200MM

RANDOM
09



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7



PHASE - 8



PHASE - 9

YARRA

DAKOTA NATURAL




200X
1200MM

RANDOM
10



PHASE - 1

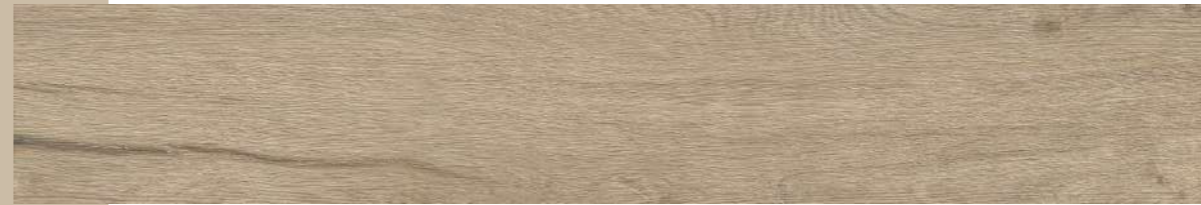

PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6




PHASE - 7



PHASE - 8



PHASE - 9

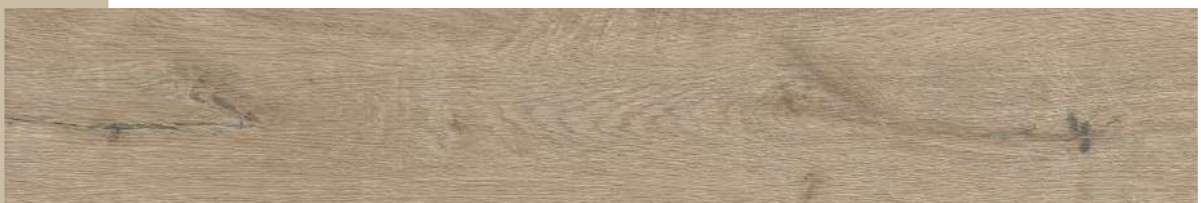



DAKOTA NATURAL

YARRA

DAKOTA MAPLE



200X
1200MM

RANDOM
10



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7




PHASE - 8



PHASE - 9



LAYING SOLUTIONS

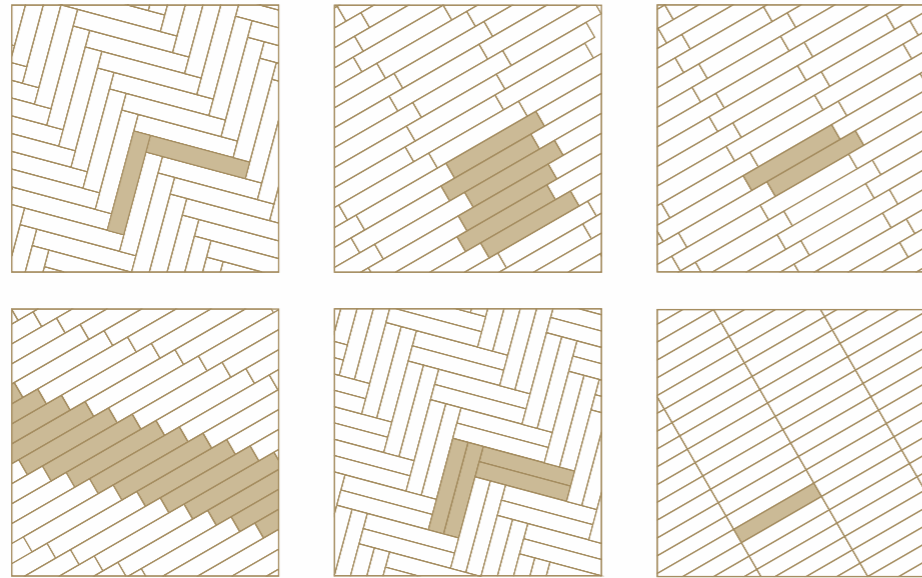

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group BIa, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupture		R ≥ 35 N/mm ²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5




YARRA

INSTALLATION ADVICE

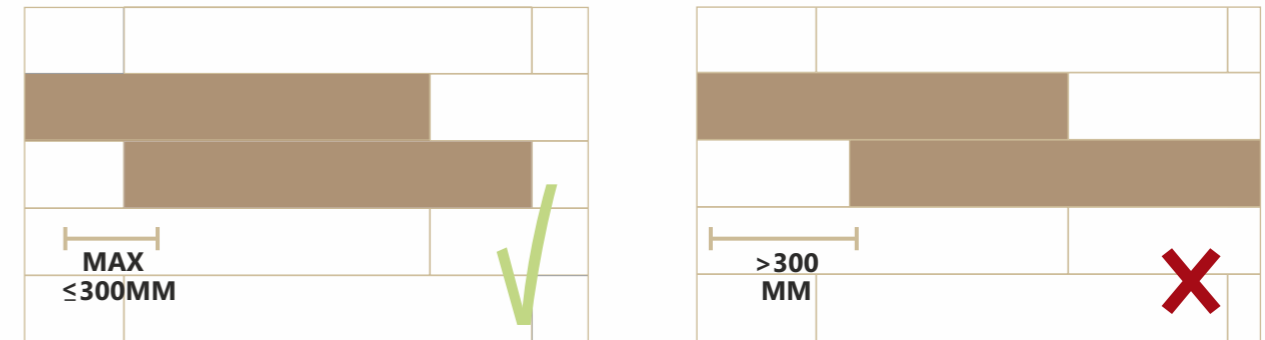

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES

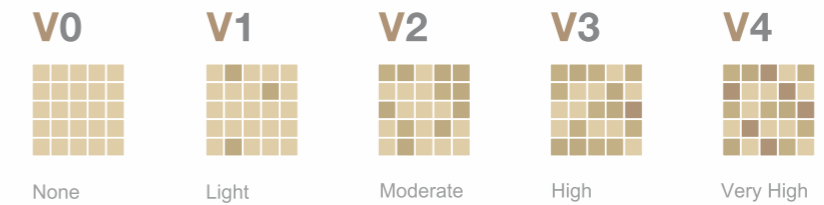

The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



*We need minimum 2000sq/mtr order for R11 surface

YARRA

A Marble Mart Company.
Asola Farm Rd, Asola Homes, Asola,
New Delhi, Delhi 110074
Contact : 9911097882

www.yarratiles.com
yarratiles@gmail.com