



# YARRA

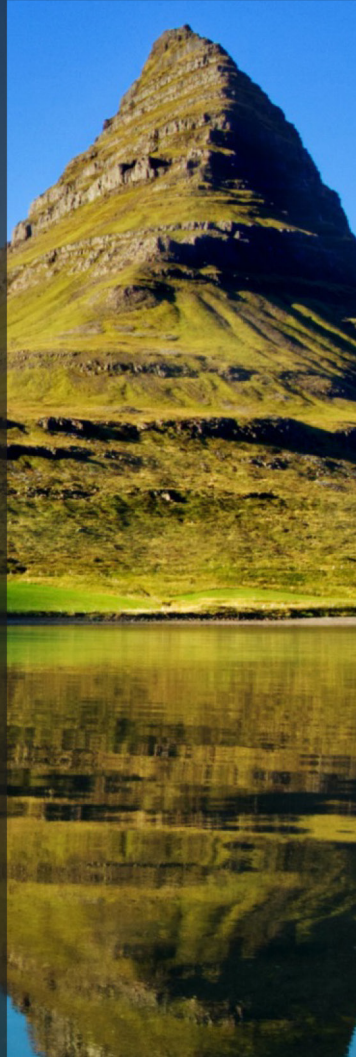

2024-25  
Collection

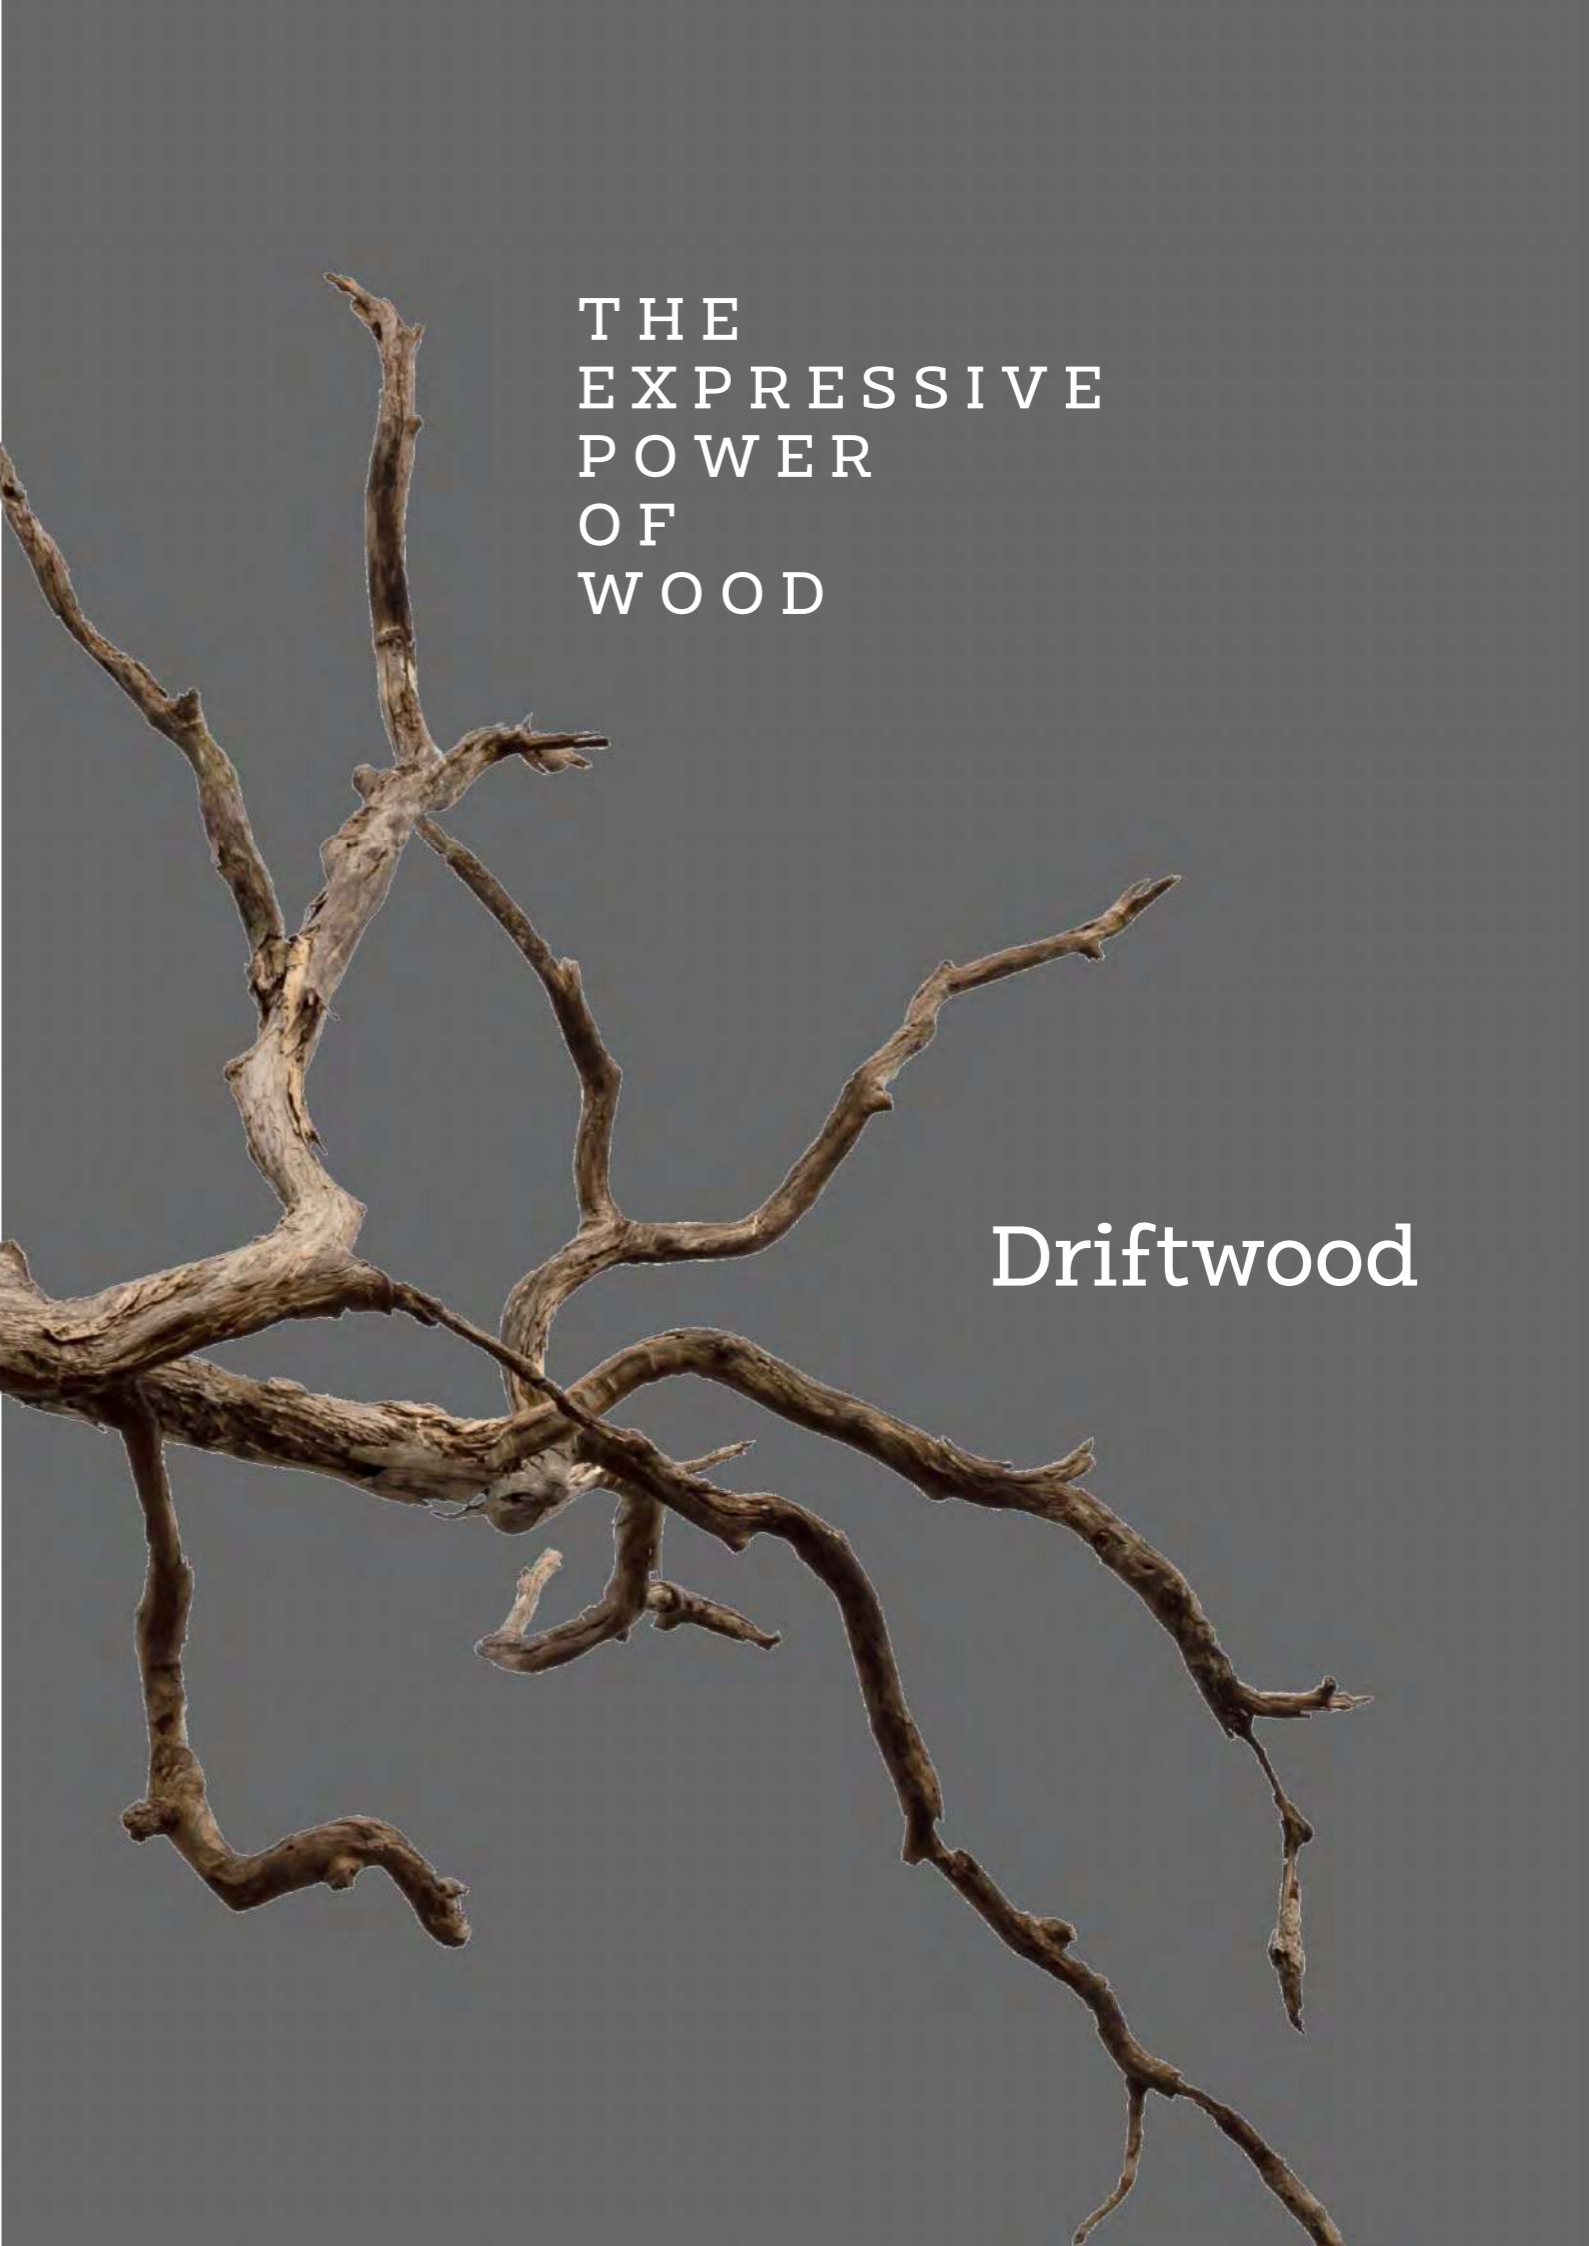

THE  
EXPRESSIVE  
POWER  
OF  
WOOD

Driftwood

# About Us

# YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

[www.yarratiles.com](http://www.yarratiles.com)



2 0 0  
X 1 2 0 0  
M M

# YARRA

## Driftwood


THE GEOGRES WOOD COLLECTION REPRODUCES THE IMPERFECTION AND HETEROGENEOUS DETAILS OF RECLAIMED WOODEN PLANKS, WHICH FIT IN PERFECTLY WITH THE STRICT MINIMALISM OF DESIGN AND LEND WARMTH AND AUTHENTICITY TO ANY AMBIENCE.



DRIFTWOOD ASH



# YARRA

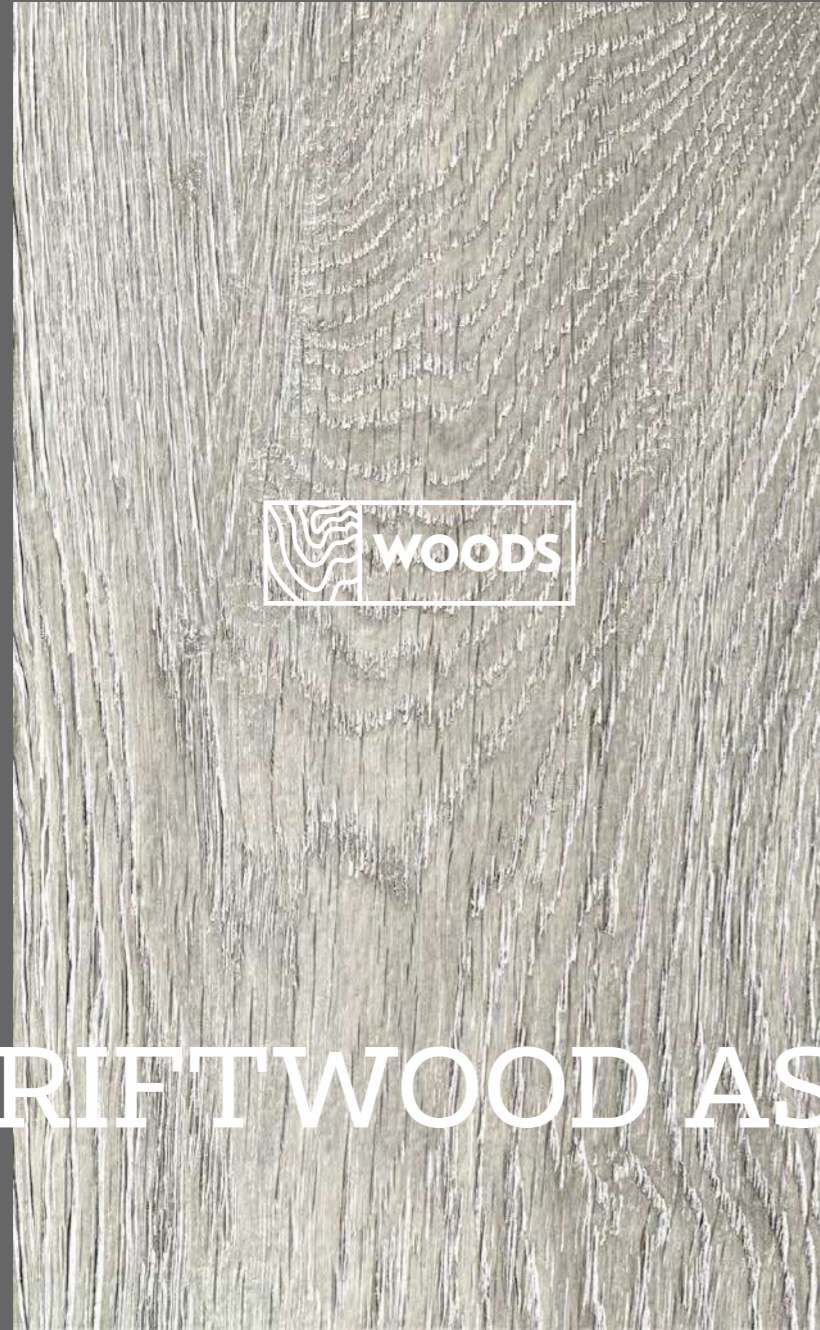

# DRIFTWOOD ASH

200X 1200MM    RANDOM 08



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8




DRIFTWOOD ASH



DRIFTWOOD CLASSIC



# YARRA

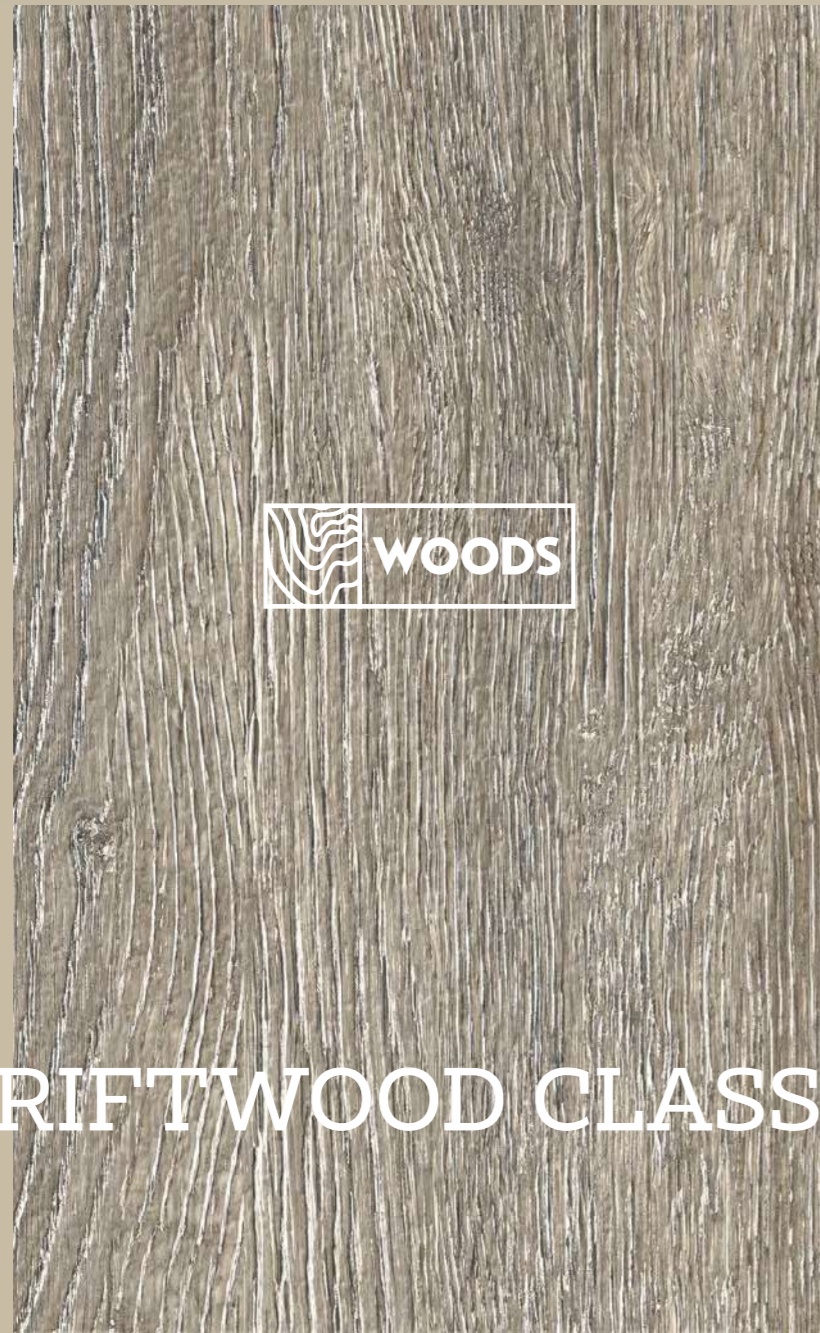

## DRIFTWOOD CLASSIC

200X 1200MM    RANDOM 08



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7




PHASE - 8

# DRIFTWOOD MAPLE



# YARRA

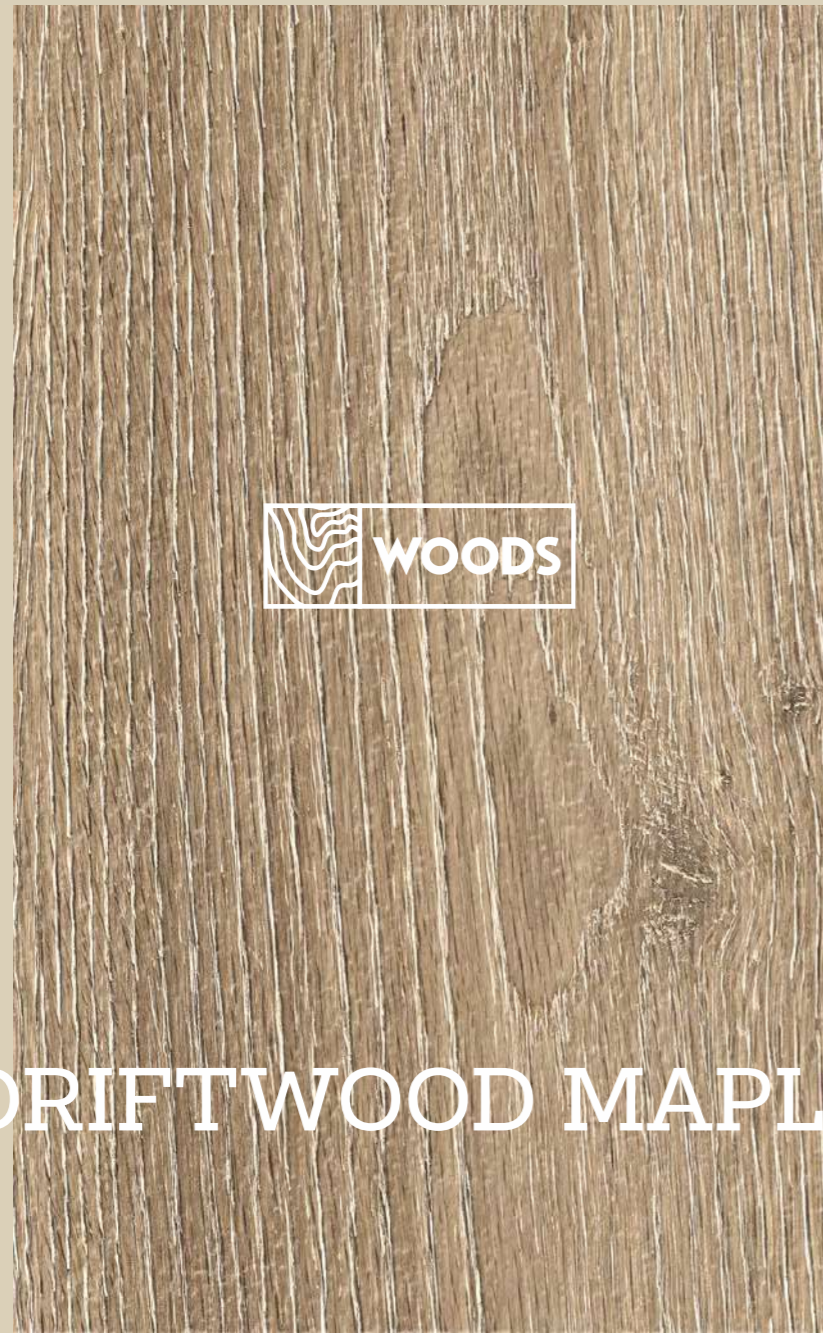

## DRIFTWOOD MAPLE

200X 1200MM    RANDOM 08



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



DRIFTWOOD MAPLE



DRIFTWOOD TEAK

# YARRA



200X  
1200MM      RANDOM  
08

# DRIFTWOOD TEAK



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6




PHASE - 7



PHASE - 8

## LAYING SOLUTIONS

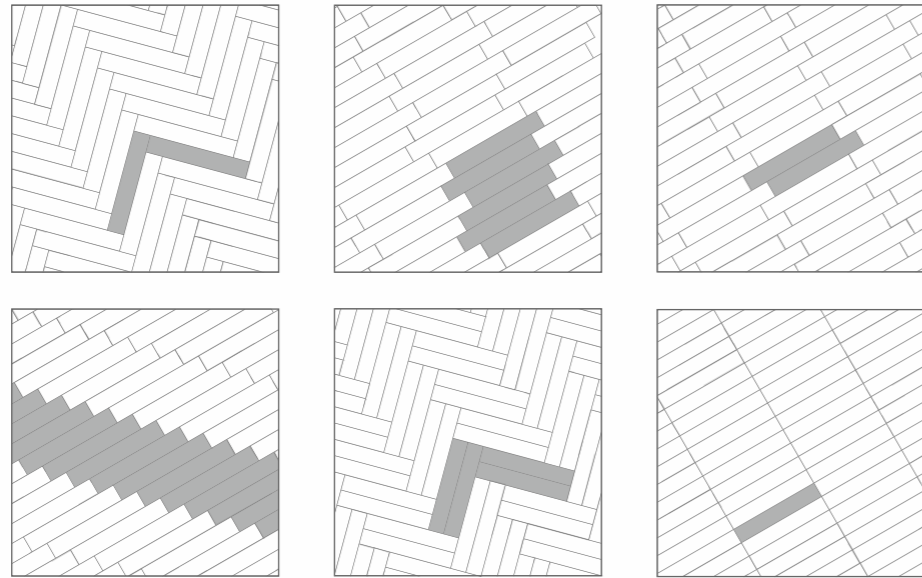


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

### Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group BIa, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupture		R ≥ 35 N/mm <sup>2</sup>	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 <sup>-6</sup> max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5




## INSTALLATION ADVICE

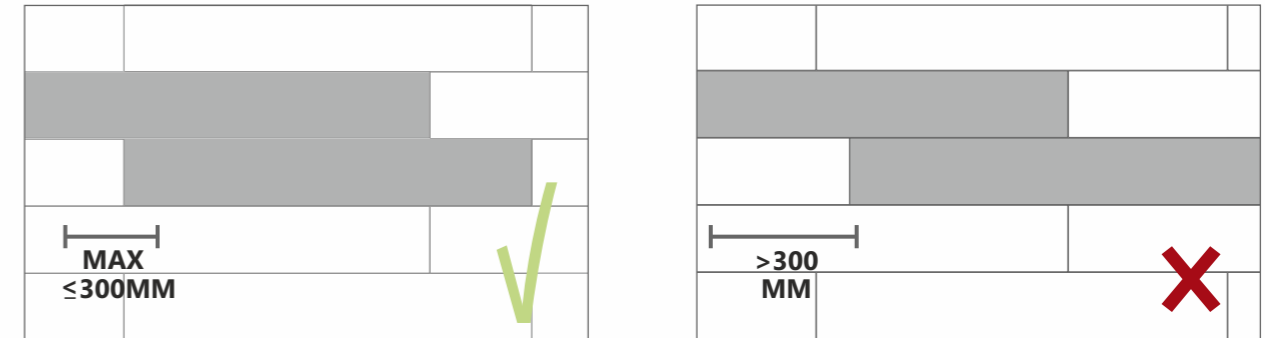

The longest side should be staggered no more than 300mm when laid in running bond.

## V SHADES

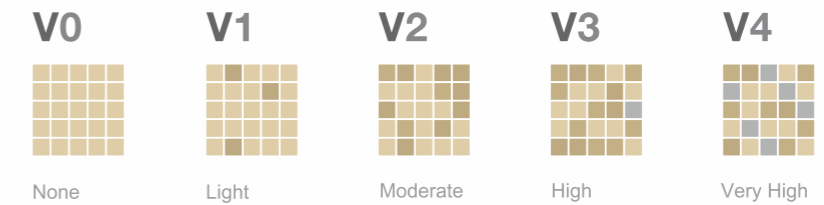

The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

## PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

## FEATURES



\*We need minimum 2000sq/mtr order for R11 surface

# YARRA

A Marble Mart Company.  
Asola Farm Rd, Asola Homes, Asola,  
New Delhi, Delhi 110074  
**Contact : 9911097882**

[www.yarratiles.com](http://www.yarratiles.com)  
[yarratiles@gmail.com](mailto:yarratiles@gmail.com)