


YARRA

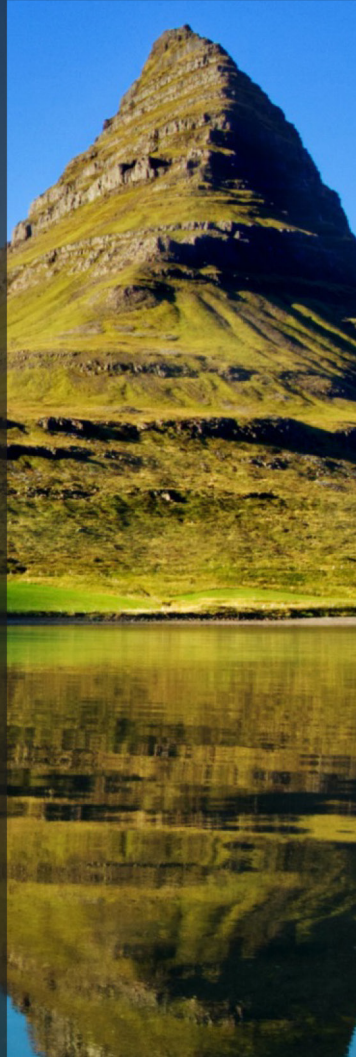

2024-25
Collection

www.yarratiles.com

MOHAWK



SERIES



BY

YARRA

YARRA

SOLUTION TO ALL YOUR DESIGN NEEDS.

Geo Gres offers a complete solution for porcelain floors and walls that consist of excellent technical performance and unique aesthetic appeal.

The variety and complete range of Geo Gres porcelain meets your needs of contemporary planning for indoor and outdoor design solution.



THE FINEST WOODWORK FOR THE FINEST LIVING.

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.



200X1200MM



WALNUT

NATURAL

GRIS



MOHAWAK

THE GEOGRES WOOD COLLECTION REPRODUCES THE IMPERFECTION AND HETEROGENEOUS DETAILS OF RECLAIMED WOODEN PLANKS, WHICH FIT IN PERFECTLY WITH THE STRICT MINIMALISM OF DESIGN AND LEND WARMTH AND AUTHENTICITY TO ANY AMBIENCE.

200X
1200MM RANDOM
08

www.geogres.in

YARRA

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



**MOHAWK
NATURAL**



YARRA

MOHAWK NATURAL

YARRA



MOHAWK
GRIS

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7




PHASE - 8

200X
1200MM

RANDOM
08

200X
1200MM RANDOM
08



YARRA

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7




PHASE - 8



**MOHAWK
WALNUT**

LAYING SOLUTIONS

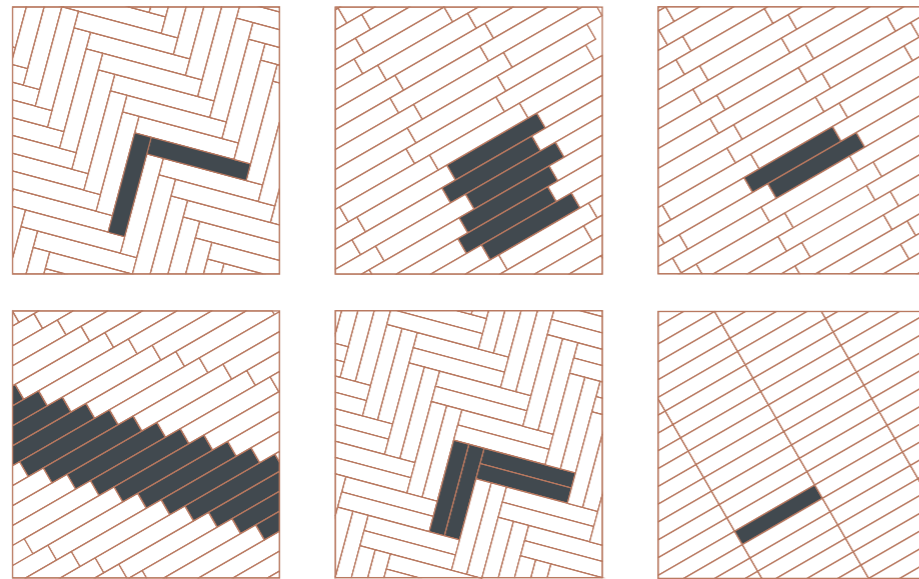

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


PORCELAIN STONWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	$\pm 0,3\%$, max 1 mm	In According	
		Thickness	$\pm 5\%$, max 0,5 mm	In According	
		Wedging	$\pm 0,3\%$, max 1,5 mm	In According	
		Straightness of the edges	$\pm 0,3\%$, max 0,8 mm	In According	
		Flatness	$\pm 0,4\%$, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	$\leq 0,5\%$	In According	
		Breaking strength	$S \geq 1300$ N	$S \geq 2000$ N	
		Modulus of rupture	$R \geq 35$ N/mm ²	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	9×10^{-6} max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



YARRA

INSTALLATION ADVICE

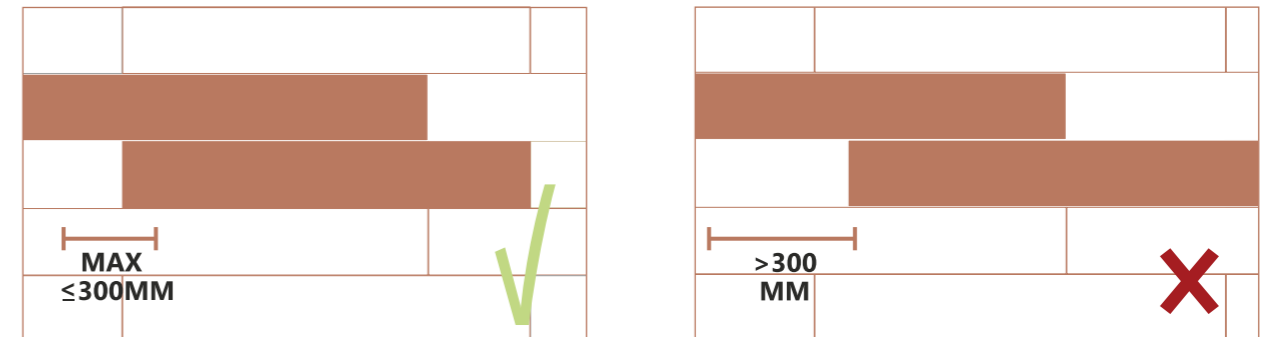

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



YARRA

A Marble Mart Company.
Asola Farm Rd, Asola Homes, Asola,
New Delhi, Delhi 110074
Contact : 9911097882

www.yarratiles.com
yarratiles@gmail.com