


YARRA



2024-25
Collection

www.yarratiles.com

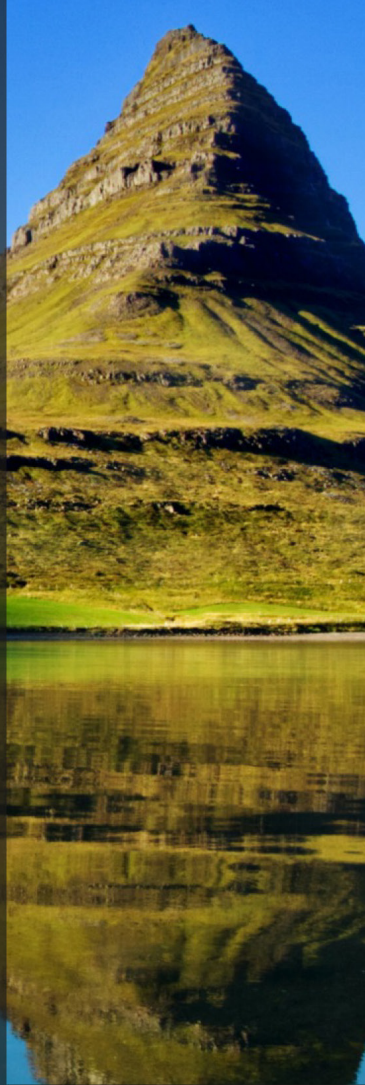

**200 X
1200MM**



by

YARRA

TIMBER

TIMBER

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.

About Us

YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

www.yarratiles.com





creativity
for your
kitchen &
living

COLORS


TIMBER ASH



TIMBER MAHOGANY



TIMBER WALNUT

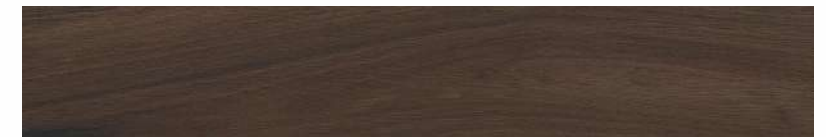

TIMBER WENGE



YARRA

TIMBER ASH



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9



YARRA



**TIMBER
ASH**

YARRA



**200X
1200MM**

RANDOM - 9

TIMBER MAHOGANY



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9




YARRA



**TIMBER
MAHOGANY**


YARRA

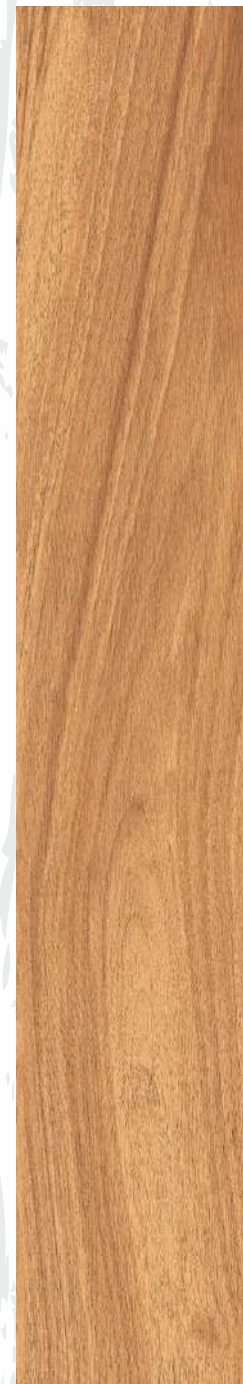

**200X
1200MM**

RANDOM - 9

TIMBER WALNUT

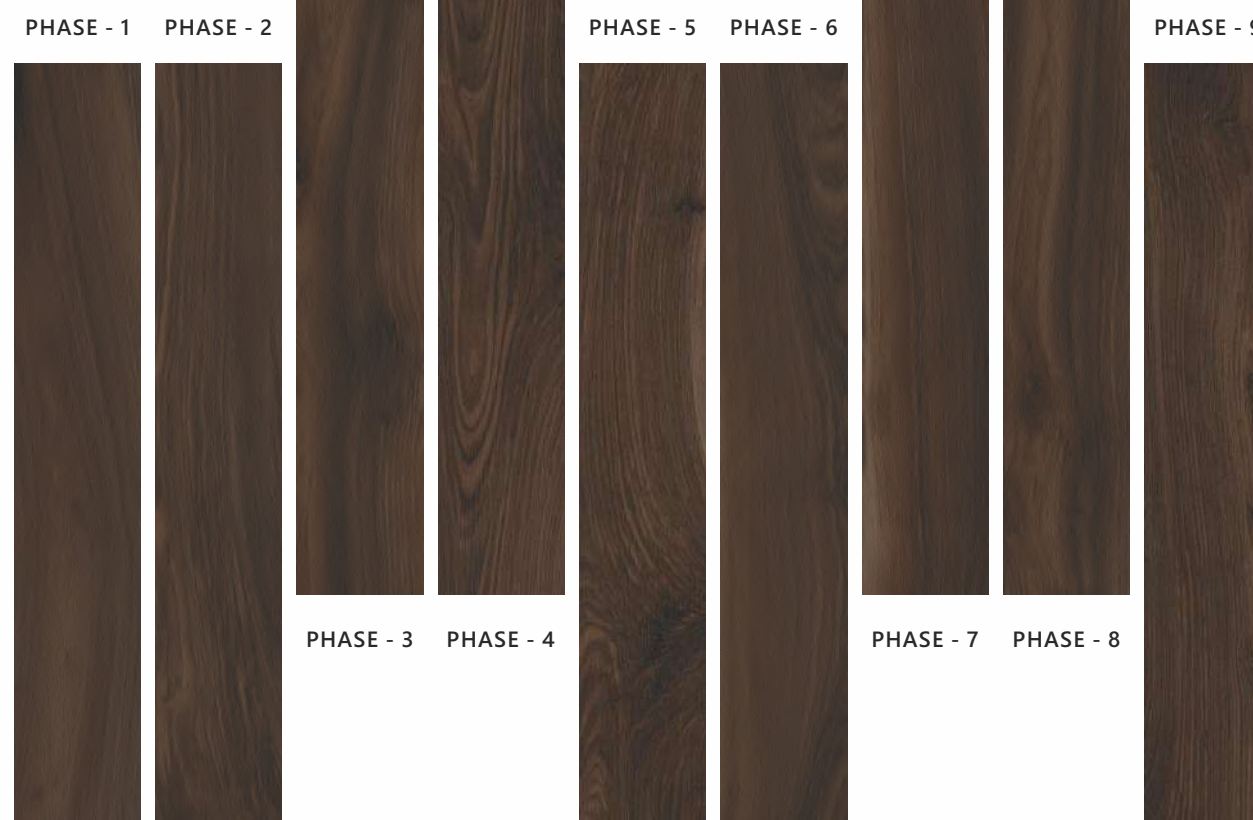

YARRA



**TIMBER
WALNUT**

YARRA



**200X
1200MM**

RANDOM - 9

TIMBER WENGE



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9



YARRA



**TIMBER
WENGE**


YARRA



**200X
1200MM**

RANDOM - 9

LAYING SOLUTIONS

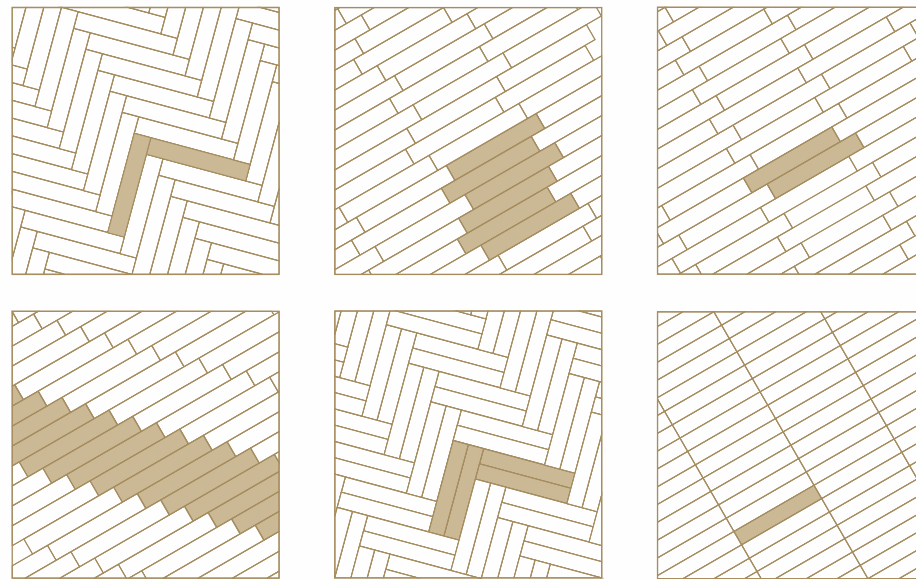


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group BIa, E ≤ 0.5%

| TECHNICAL SPECIFICATIONS | | STANDARDS | VALUES REQUIRED | OUR VALUES | |
|--------------------------|--|--|--|--|----------|
| | | | RECTIFIED | MATT | |
| DIMENSIONS | | Length and width | ± 0,3%, max 1 mm | In According | |
| | | Thickness | ± 5%, max 0,5 mm | In According | |
| | | Wedging | ± 0,3%, max 1,5 mm | In According | |
| | | Straightness of the edges | ± 0,3%, max 0,8 mm | In According | |
| | | Flatness | ± 0,4%, max 1,8 mm | In According | |
| STRUCTURE | | Water absorption - average value % | ≤ 0,5% | In According | |
| | | Breaking strength | S ≥ 1300 N | S ≥ 2000 N | |
| | | Modulus of rupture | R ≥ 35 N/mm ² | In According | |
| | | Resistance to surface abrasion | According to classification indicator by manufacture | PEI IV | |
| THERMAL SHOCK | | Coefficient of thermal linear expansion | 9 x 10 ⁻⁶ max | In According | |
| | | Thermal shock resistance | Resistant | Resistant | |
| | | Resistance to frost | Resistant | Resistant | |
| SAFETY | | Dynamic friction coefficient | DIN 51130 | According to the space or the working area | R9 / R11 |
| CHEMICAL RESISTANCE | | Resistance to high concentrations of acids and alkalis | Class GHC Min. | Class GHA | |
| | | Resistance to low concentrations of acids and alkalis | Class GLC Min. | Class GLA | |
| | | Stain resistance | ISO 10545-14 | Min. class 3 | 5 |



INSTALLATION ADVICE

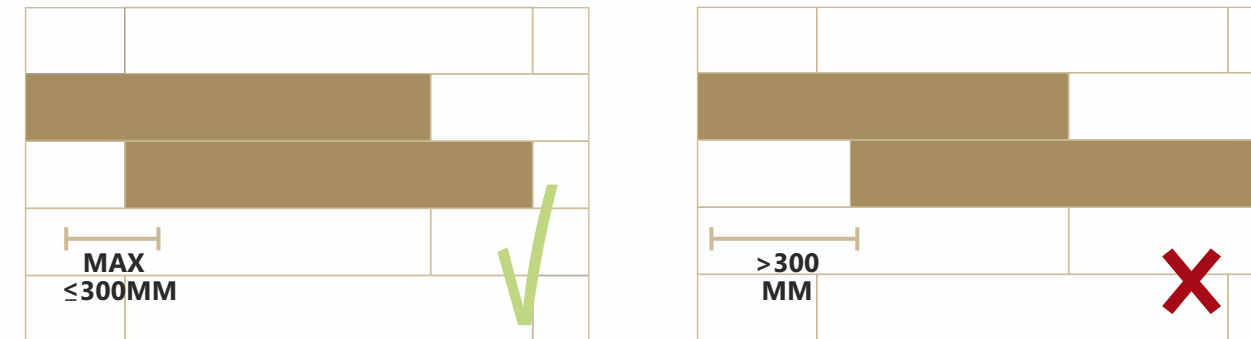

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

| SIZE | THICKNESS | PCS./BOX | SQM/BOX | SQF/BOX |
|-------------|-----------|----------|---------|---------|
| 200x1200 mm | 9 MM | 5 | 1.20 | 12.91 |

FEATURES



*We need minimum 2000sq/mtr order for R11 surface

YARRA

A Marble Mart Company.
Asola Farm Rd, Asola Homes, Asola,
New Delhi, Delhi 110074
Contact: 9911097882

www.yarratiles.com
yarratiles@gmail.com