


YARRA



2024-25
Collection

www.yarratiles.com

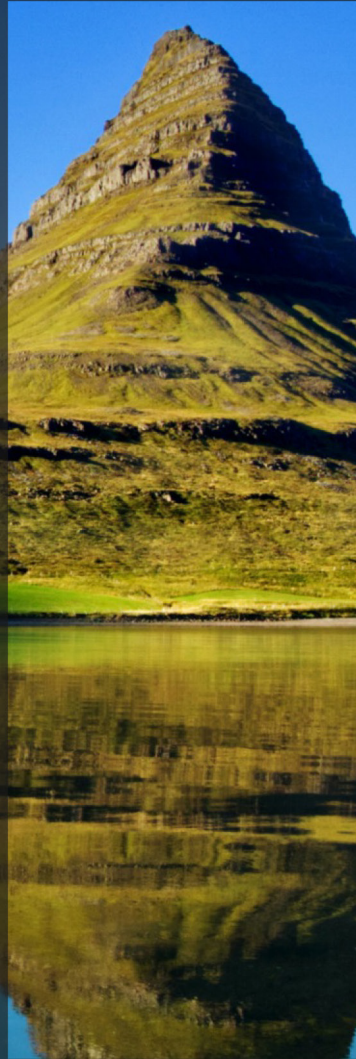

BOHEMIAN

SERIES



BY


YARRA

About Us

YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

www.yarratiles.com

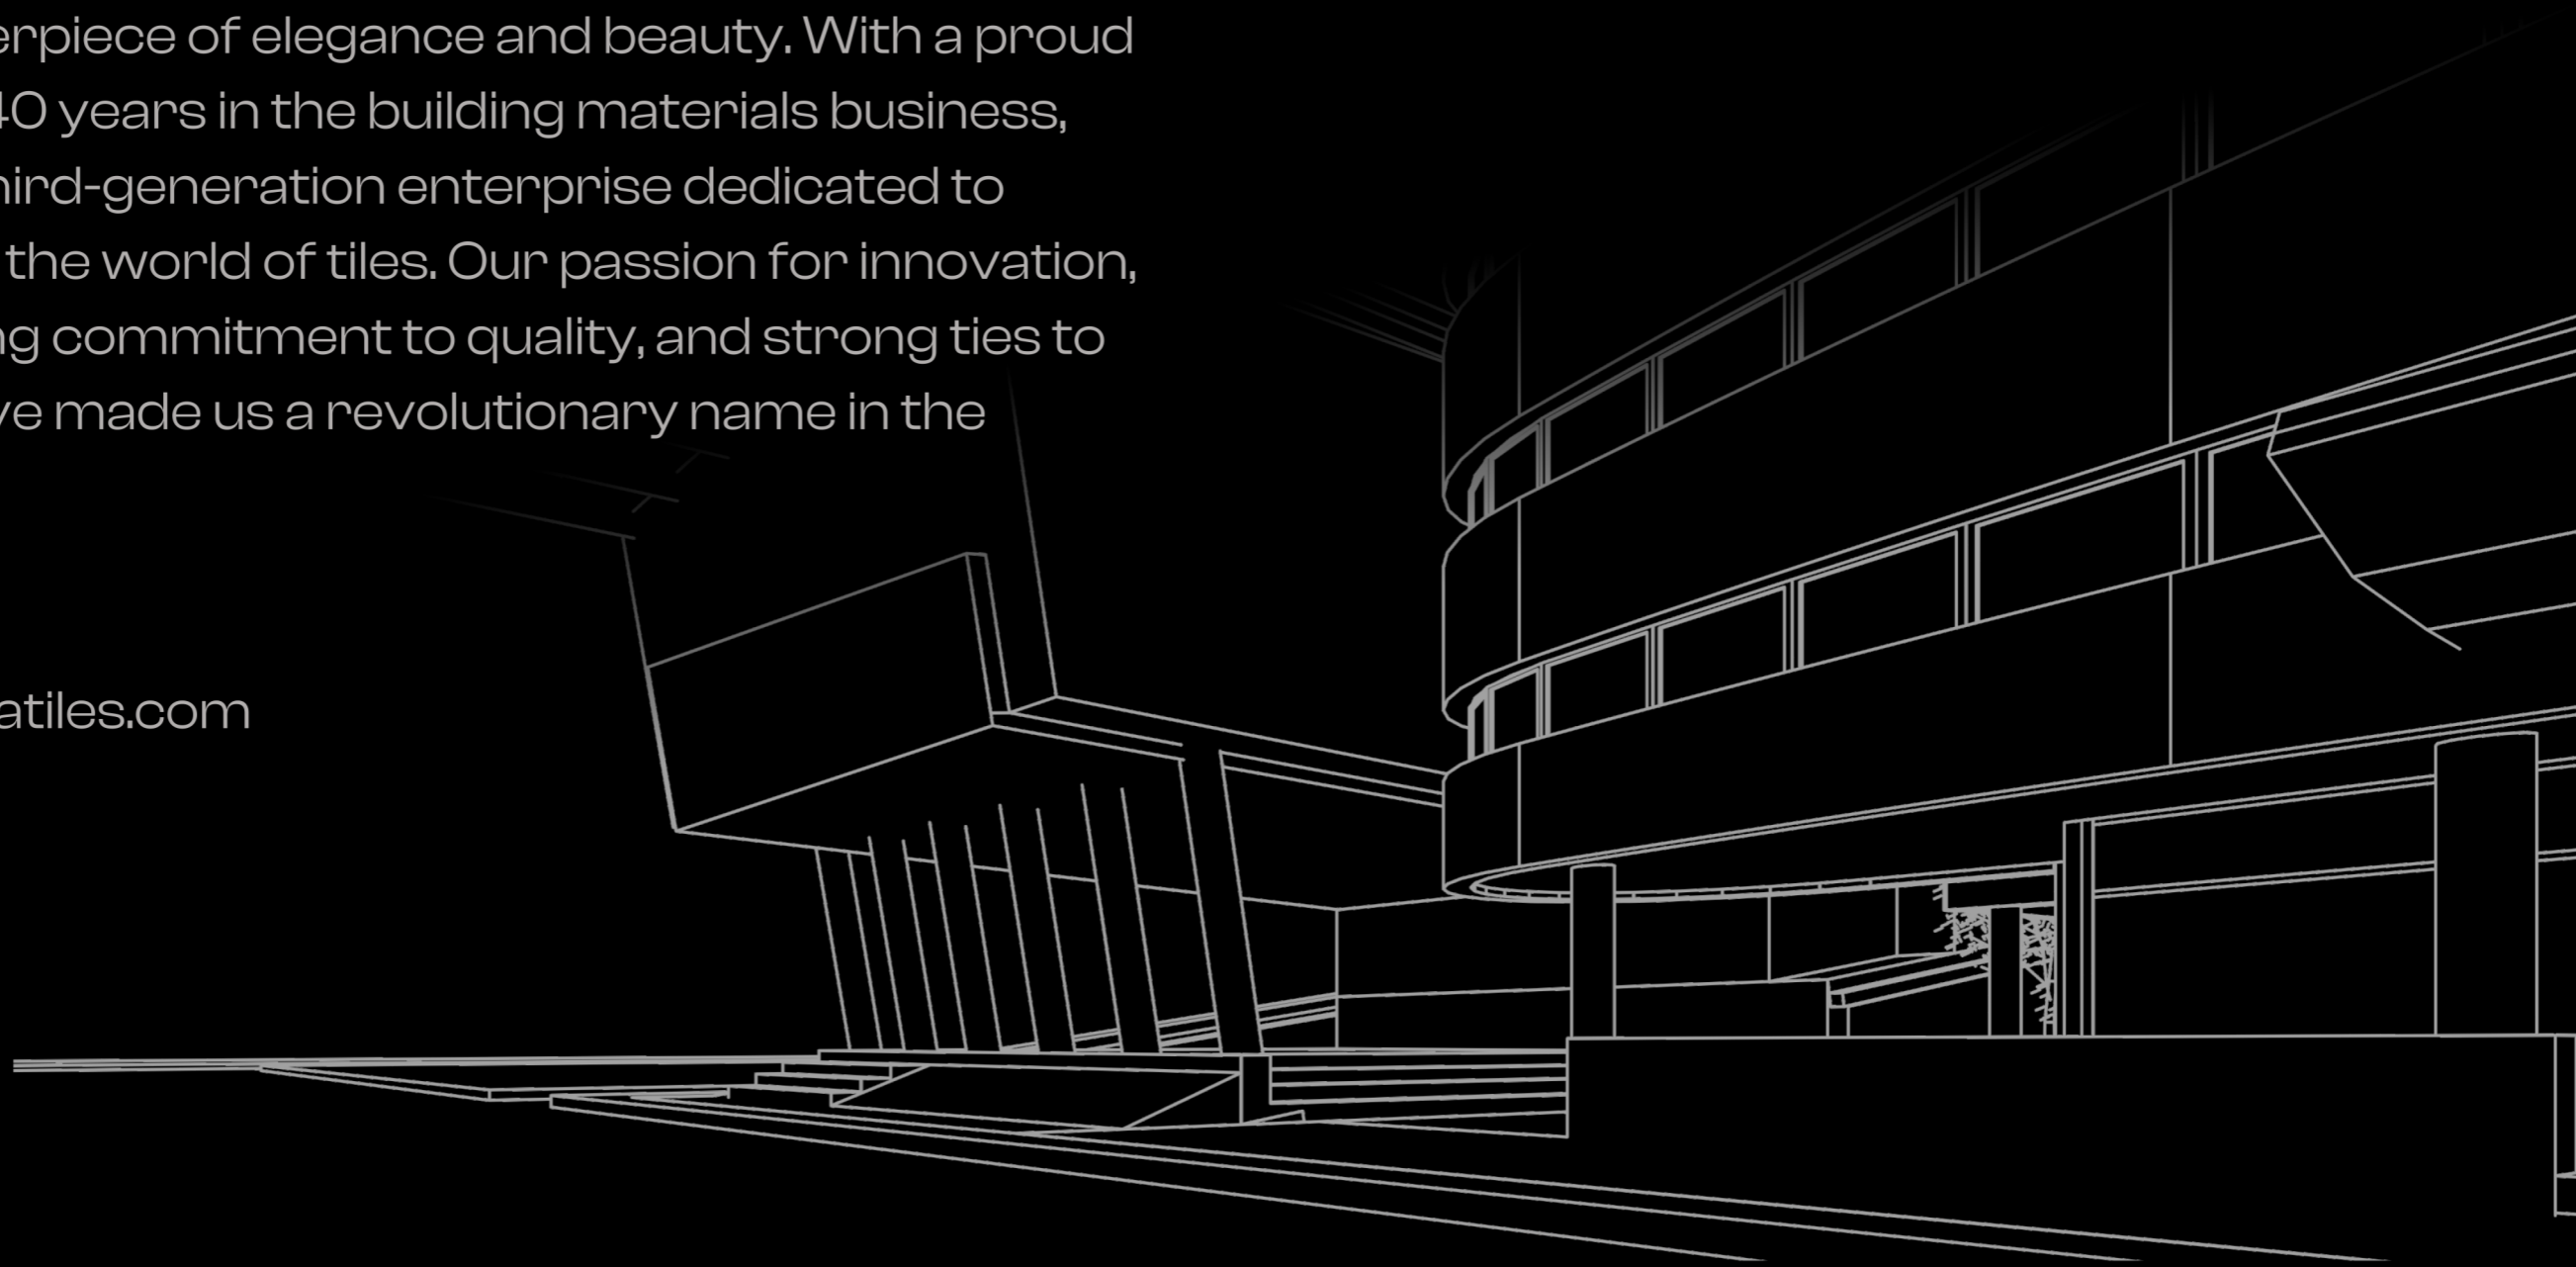

200X1200MM



BROWN



NATURAL



PEACH



WHITE
OAK

BOHEMIAN

THE GEOGRES WOOD COLLECTION REPRODUCES THE IMPERFECTION AND HETEROGENEOUS DETAILS OF RECLAIMED WOODEN PLANKS, WHICH FIT IN PERFECTLY WITH THE STRICT MINIMALIS OF DESIGN AND LEND WARMTH AND AUTHENTICITY TO ANY AMBIENCE.





BOHEMIAN

CRAFTED
INNOVATIVELY
FOR BEAUTIFUL
LIVING



YARRA

YARRA

BOHEMIAN
WHITE
OAK

200X
1200MM

RANDOM
7

PHASE - 1

PHASE - 2



PHASE - 5

PHASE - 6

PHASE - 3

PHASE - 4

PHASE - 7

YARRA

BOHEMIAN
WHITE
OAK

CEPT



YARRA

BOHEMIAN
NATURAL

200X
1200MM

RANDOM
7

PHASE - 1

PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7

YARRA

BOHEMIAN
PEACH

200X
1200MM

RANDOM
7

PHASE - 1

PHASE - 2



PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6



PHASE - 7

YARRA

BOHEMIAN
PEACH



YARRA

BOHEMIAN
BROWN

200X
1200MM

RANDOM
7

PHASE - 1

PHASE - 2



PHASE - 5

PHASE - 6




PHASE - 3

PHASE - 4

PHASE - 7

LAYING SOLUTIONS

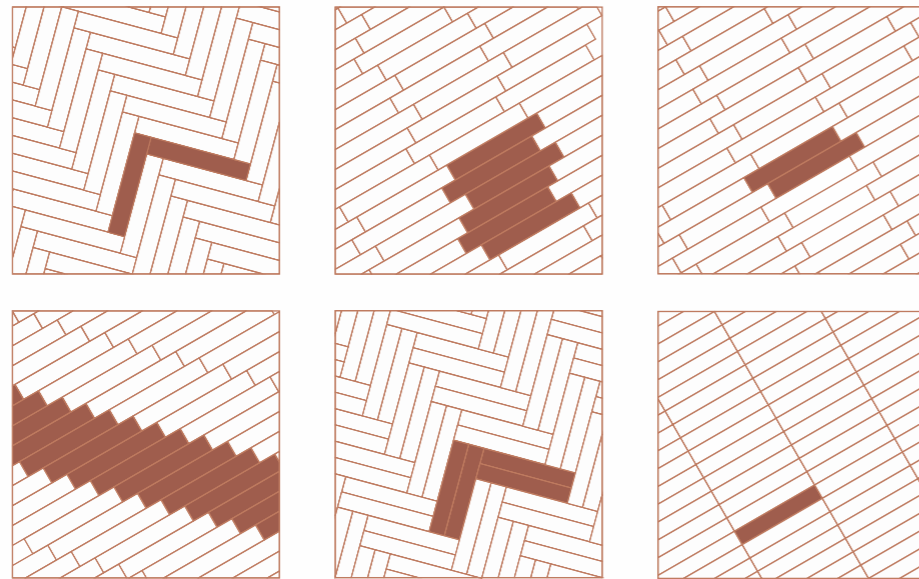

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


PORCELAIN STONWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	≥ 1300 N	≥ 2000 N
		Modulus of rupture		R ≥ 35 N/mm ²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5




YARRA

INSTALLATION ADVICE

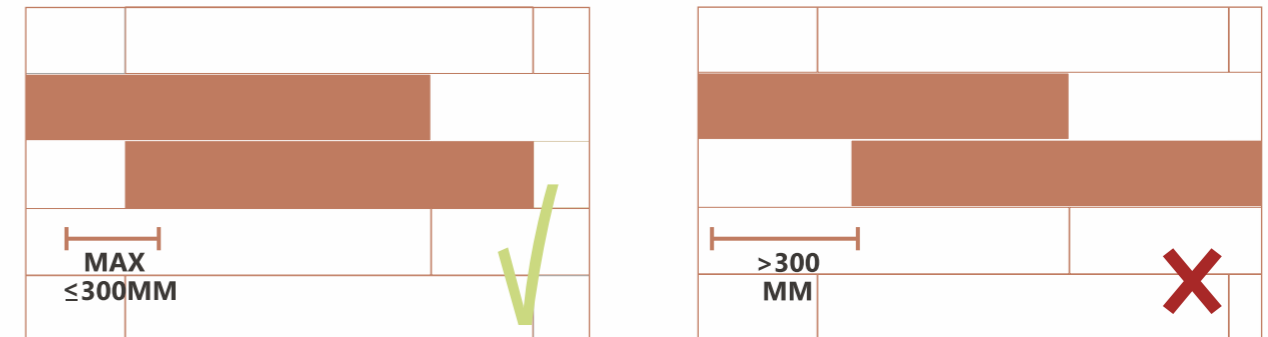

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES

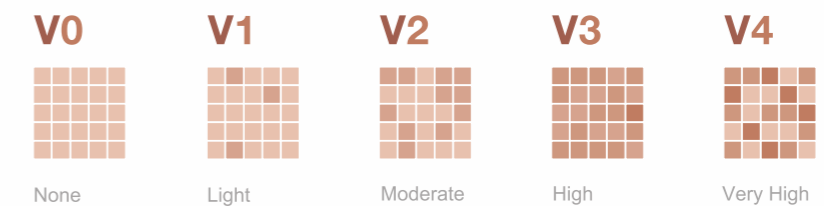

The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



YARRA

A Marble Mart Company.
Asola Farm Rd, Asola Homes, Asola,
New Delhi, Delhi 110074
Contact : 9911097882

www.yarratiles.com
yarratiles@gmail.com