


YARRA

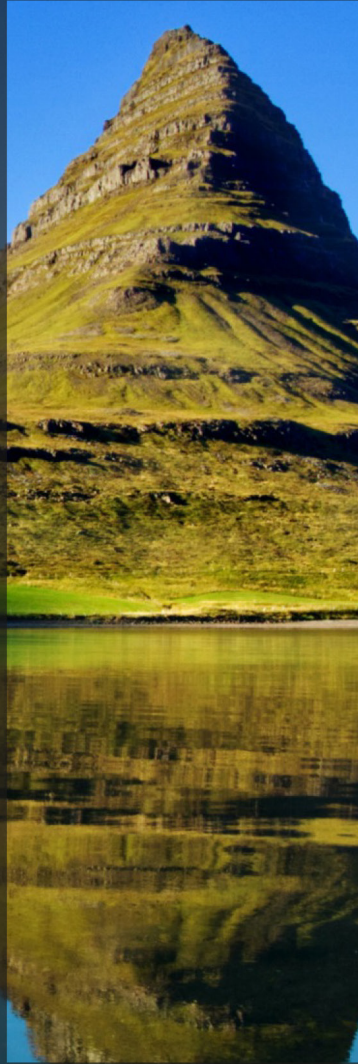

2024-25
Collection

www.yarratiles.com

About Us

YARRA

At YARRA Tiles, we believe that every space deserves to be a masterpiece of elegance and beauty. With a proud legacy of 40 years in the building materials business, we are a third-generation enterprise dedicated to redefining the world of tiles. Our passion for innovation, unwavering commitment to quality, and strong ties to nature have made us a revolutionary name in the industry.

www.yarratiles.com



TECHNICAL ADVANTAGE



EXTRA
GLOSS



YARRA


ARMANI GREY

Finish


**EXTRA
GLOSS**



Body & thickness



Size



Body color

Grey

Random



www.geogres.in

YARRA


CALISTO WHITE

Finish


**EXTRA
GLOSS**



Body & thickness



Size



Body color

White

Random



www.geogres.in

YARRA


CAPRICE BORGATA

Finish


**EXTRA
GLOSS**



Body & thickness



Size



Body color

White

Random



www.geogres.in



YARRA

CARRARA

Finish


**EXTRA
GLOSS**



Body & thickness



Size




Body color

White

Random



www.geogres.in

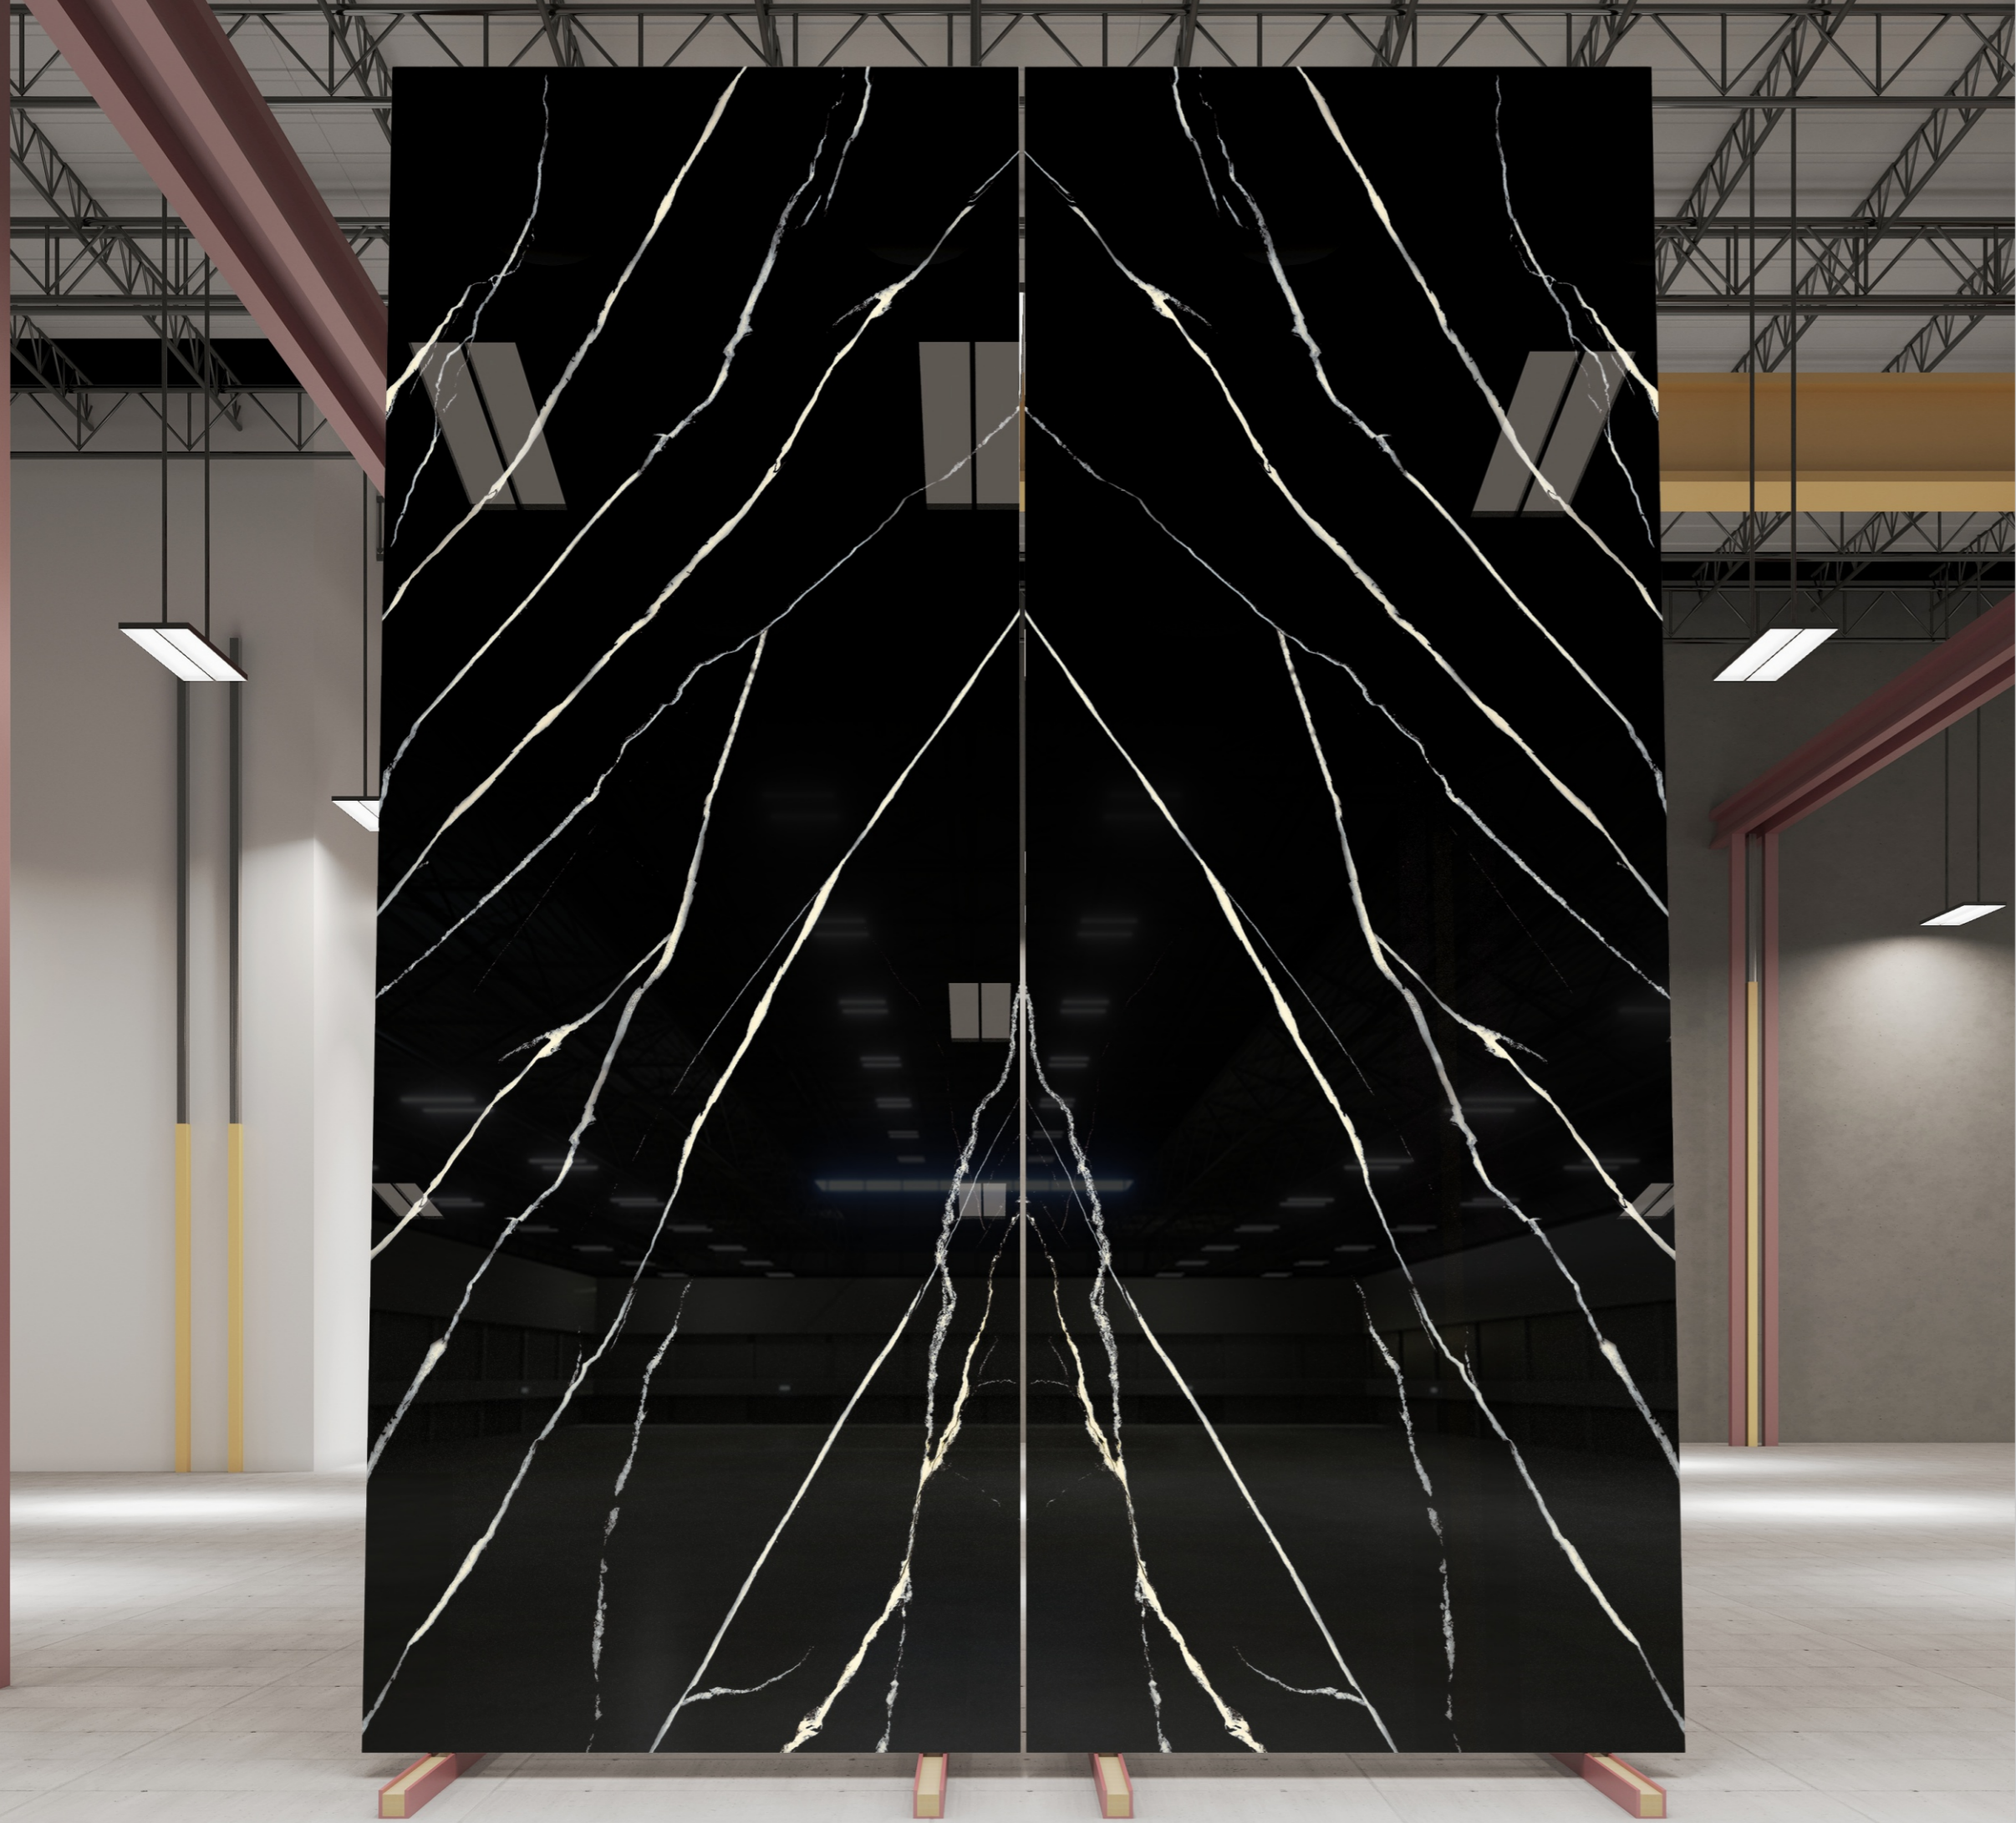

YARRA

MARQUINA NATURAL

Finish


**EXTRA
GLOSS**



Body & thickness



Size



Body color

Black

Random



www.geogres.in

YARRA


NERO SAINT LORENT

Finish


**EXTRA
GLOSS**



Body & thickness



Size



Body color

Black

Random



www.geogres.in

YARRA


PIETRA GREY

Finish


**EXTRA
GLOSS**



Body & thickness



Size



Body color

Grey

Random



www.geogres.in

YARRA


ROMA WHITE

Finish


**EXTRA
GLOSS**



Body & thickness



Size



Body color

White

Random



www.geogres.in

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.BIa	MEAN VALUE OF GEOSLAB	TEST METHOD
Regulatory Properties			
Deviation in Length and Width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00 % (±0.50mm)	± 5.00 %	ISO 10545-2
Straightness in Side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10%	ISO 10545-2
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Warpage	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(for Plain Colour)	ΔE < 1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value> 90	Gloss Meter 60°
Glossiness (Matt)	as per mfg.	3 <Gloss Value<7	Gloss Meter 60°
Glossiness (Satin/Posh)	as per mfg.	7<Gloss Value<18	Gloss Meter 60°
Structural Properties			
Water absorption	≤ 0.50 %	≤ 0.060 %	ISO 10545-3
Bulk density	as per mfg.	Min. 2.28 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 35.0 N/mm ²	Min. 42.0 N/mm ²	ISO 10545-4
Breaking strength thickness <7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking strength thickness ≥7.5mm	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness #	as per mfg.	Glossy Min. 4*/ Posh Min. 6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Glossy Min. 2/ Posh Min. 3	ISO 10545-7
Deep abrasion resistance #	Max. 175m ³ m	Max. 132m ³ m	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 ⁻⁶	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLB**	ISO 10545-13
Resistance to high concentrate acid and alkalis glazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance(DCOF-DRY) ##	as per mfg.	Glossy P0(¹²) / Posh ≥P ¹²⁻²⁴	BS 7976-2
Slip resistance(DCOF)(R value) ##	as per mfg.	R9 to R13	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

* With Nano polished
 ** Except Hydrofluoric Acid & it's compound
 # Tiles Intended for use on floor
 ## As per customer requirement

YARRA

PACKING DETAIL

SIZE	THICKNESS	NO. OF SLAB/BOX	WEIGHT/BOX	COVERAGE AREA
120x320 cm	1.5 cm	1 Pcs.	135 kg approx	3.84 sq meter

YARRA

A Marble Mart Company.
Asola Farm Rd, Asola Homes, Asola,
New Delhi, Delhi 110074
Contact : 9911097882

www.yarratiles.com
yarratiles@gmail.com